



EMPOWERED BY PASSION ✨

SLIMFIX

3 Solutions, 1 System

SLIMFIX

Modules

Curve
Cylinder
Square

Ultra-thin Optical

15/24/38/60

Anti-glare ring



Oval Filter

Square filter

Honeycomb

Snoot

Baffle

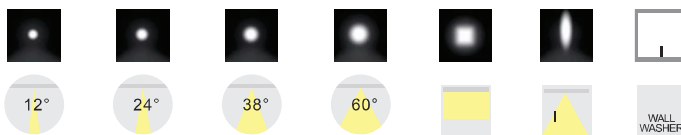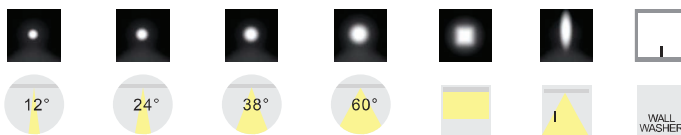


ULTRA THIN OPTIONS




**MORE COLOR
FOR CUSTOMIZED PROJECT**

For more color option, please send your request to : info@zeplinn.com

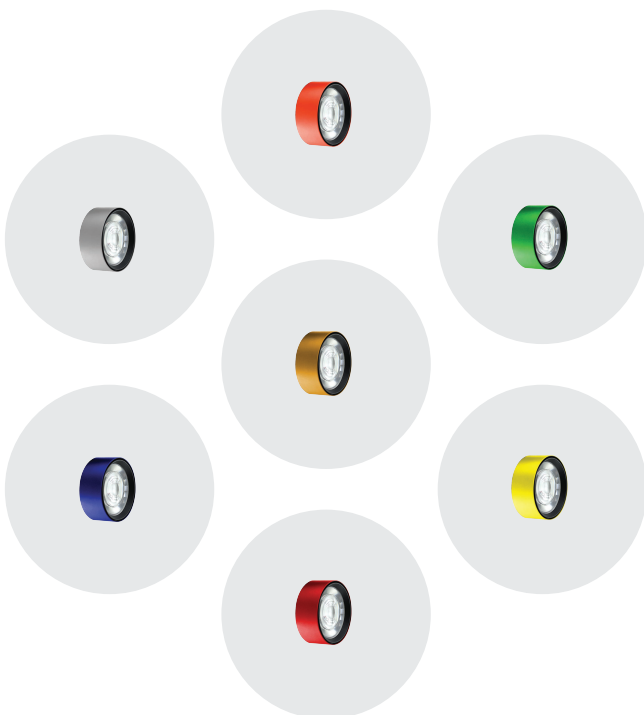


Track

SLIMFIX SERIES

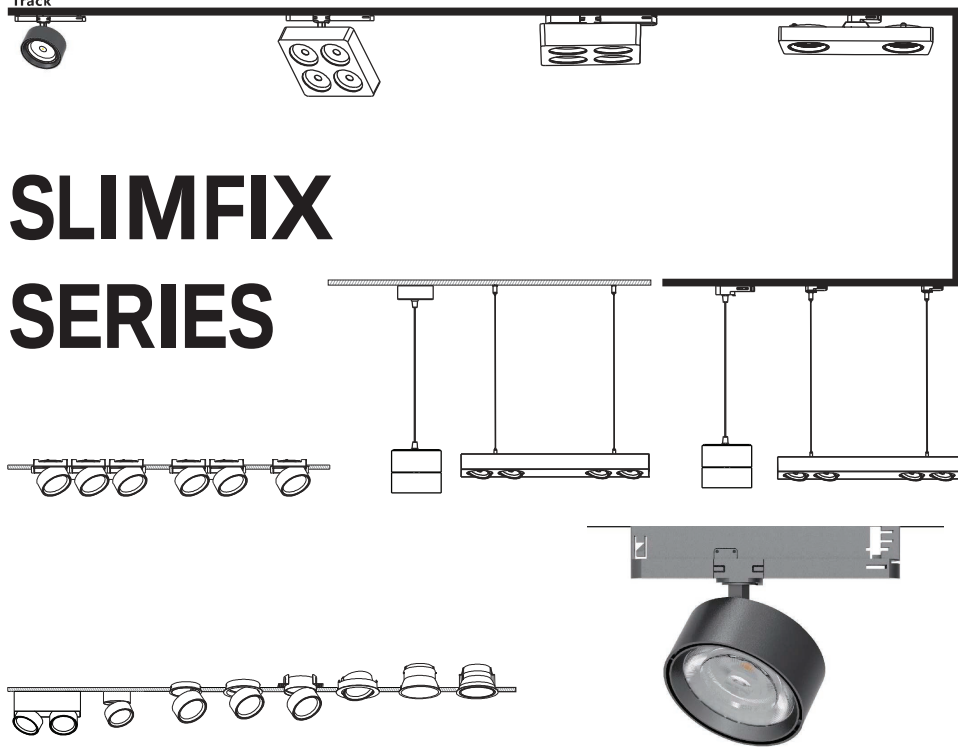

MULTIPLE COMBINATION FITTINGS

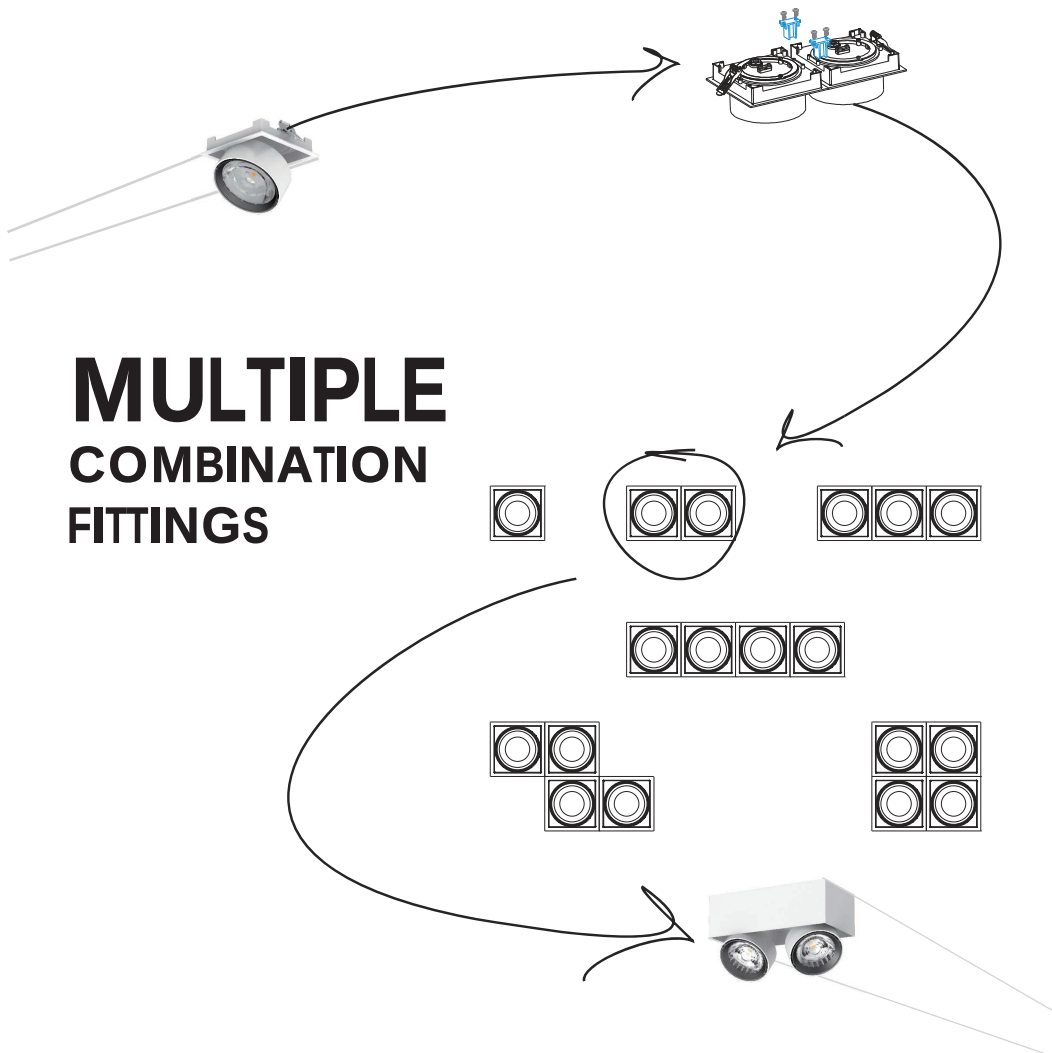



SLIMFIX

Slimfix is the new modular system for ceiling lighting. In various shapes & formats with high CRI, stylish design and latest lens technology for luxury environments.

Best Lighting for retail shops, showrooms, public buildings and museums.
Ideal choice for both accent and general & decorative lighting applications



SLIMFIX
15W/ 20W/ 28W

P.2-4



SLIMFIX SQUARE
9x5W

P.5



SLIMFIX PENDANT
15W/ 20W/ 28W

P.6-8



ROUND PENDANT
15W/ 20W/ 28W

P.9-11



SURFACE DOWNLIGHT
15W/ 20W/ 28W

P.12-14



RECESSED DOWNLIGHT
15W/ 20W/ 28W

P.15-17




RECESSED SQUARE
15W/ 20W/ 28W

P.18




Adjustable Track Light

SLIMFIX S

Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	15°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-330°
Dimensions	Ø80 x H97.7 x L162
Weight	0.35kg
Installation	Track mounted
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF

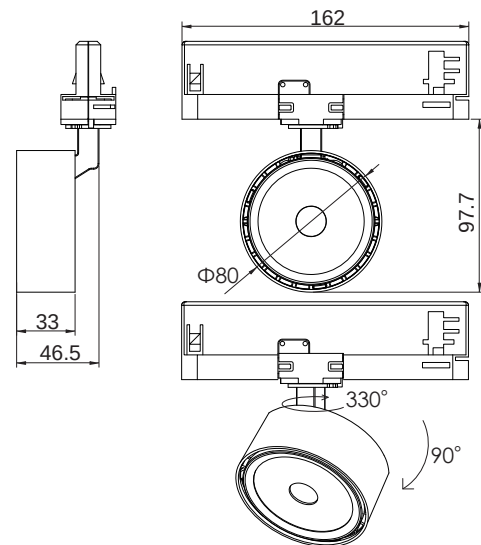

Remark

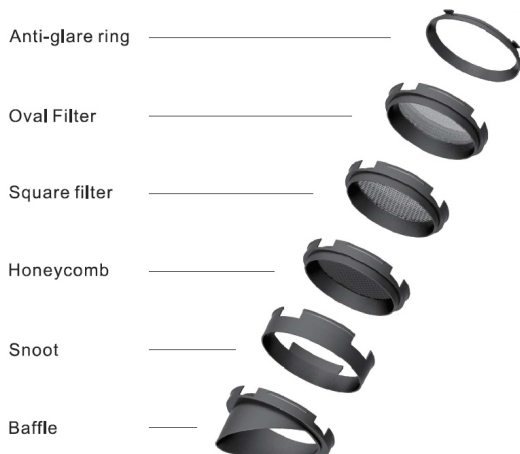

CRI90 24° 3000K

CRI90 24° 3000K

Adjustable Track Light

SLIMFIX M

Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	15°/20°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-330°
Dimensions	Ø93 x H109.6 x L197.5
Weight	0.5kg
Installation	Track mounted
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	500mA
Dimming type	ON/OFF

Remark

Anti-glare ring



Oval Filter

Square filter


Honeycomb

Snoot

Baffle

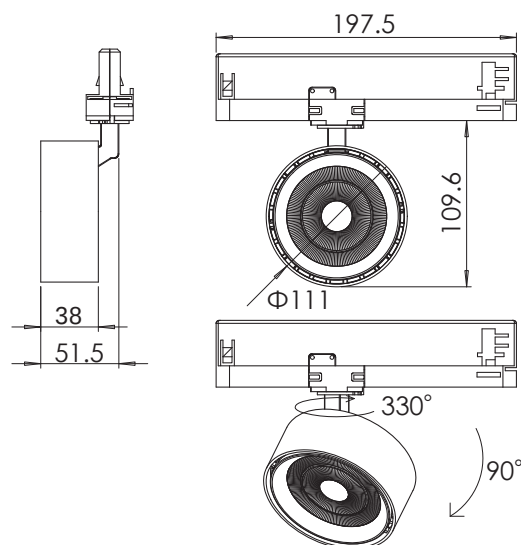

CRI90 15° 3000K




CRI90 15° 3000K



Adjustable Track Light

SLIMFIX L


Light Source	COB LED
Optic	LENS
Wattage [W]	28W
Beam angle [°]	15°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2200lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	350°
Dimensions	Ø111 x H127.4 x L197.5
Weight	0.6kg
Installation	Track mounted
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	700mA
Dimming type	ON/OFF

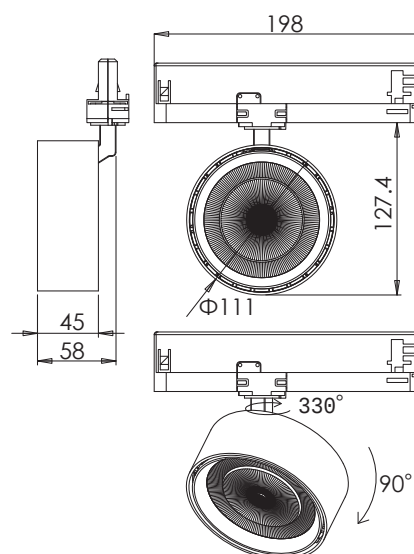

Remark

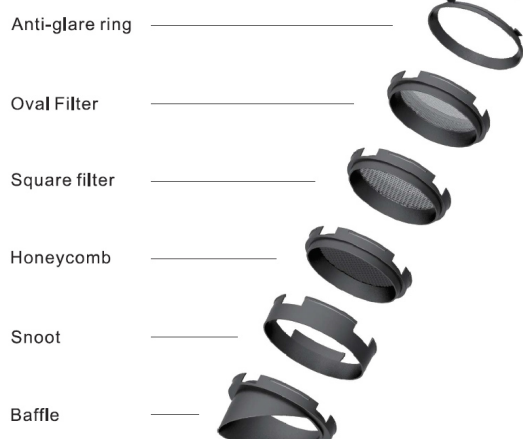

CRI90 12° 3000K



CRI90 12° 3000K


Adjustable Track Light

SLIMFIX SQUARE



Light Source	LED
Optic	LENS
Wattage [W]	9x5W
Beam angle [°]	5°/12°/24°/36°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	330°
Dimensions	H206.5 mm x W 157 mm
Weight	
Installation	Track mounted
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF

Remark

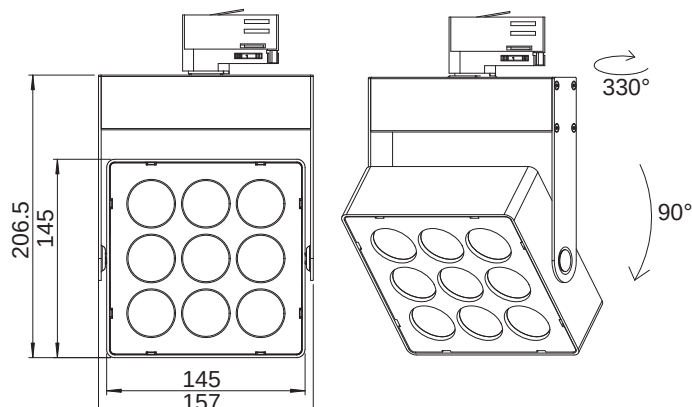




Surface mounted pendant light

SLIMFIX PENDANT S


Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	15°/24°/36°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	H66mm x Ø80mm
Weight	0.48kg
Installation	Surface Mounted
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF

Remark

Suspension cable=1m

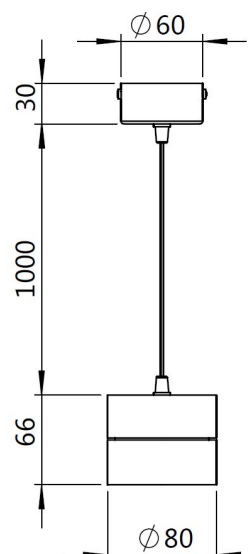

CRI90 24° 3000K



CRI90 24° 3000K





Surface mounted pendant light

SLIMFIX PENDANT M

Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	15°/20°/36°/48°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	H74mm x Ø93mm
Weight	0.6kg
Installation	Surface Mounted
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	500mA
Dimming type	ON/OFF

Remark

Suspension cable=1m

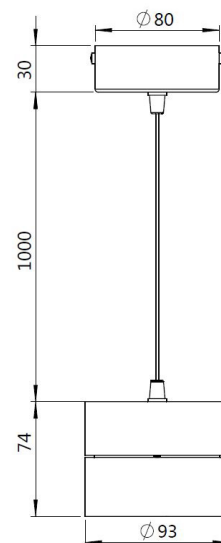

CRI90 15° 3000K

CRI90 15° 3000K




Surface mounted pendant light

SLIMFIX PENDANT L


Light Source	COB LED
Optic	LENS
Wattage [W]	28W
Beam angle [°]	12°/24°/36°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2200lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	H92mm x Ø111mm
Weight	0.85kg
Installation	Surface Mounted
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	700mA
Dimming type	ON/OFF

Remark

Suspension cable=1m

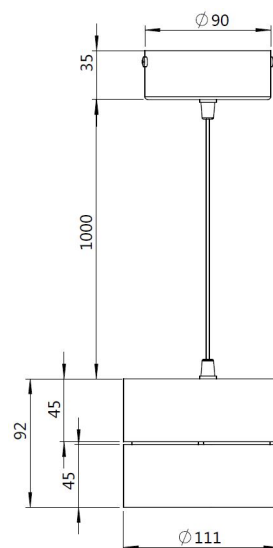

CRI90 24° 3000K



CRI90 24° 3000K




Surface mounted pendant

SLIMFIX ROUND PENDANT S


Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	12°/24°/36°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	ø 80mm
Weight	0.45kg
Installation	Surface Mounted
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF

Remark

Suspension cable=1m

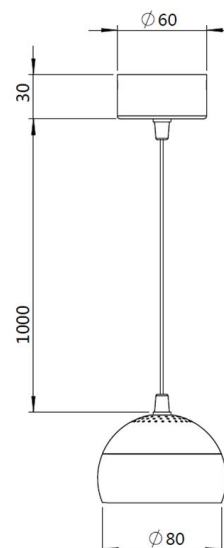

CRI90 24° 3000K



CRI90 24° 3000K




Surface mounted pendant

SLIMFIX ROUND PENDANT M


Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	12°/20°/36°/48°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	ø 93mm
Weight	0.6kg
Installation	Surface Mounted
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	500mA
Dimming type	ON/OFF

Remark

Suspension cable=1m

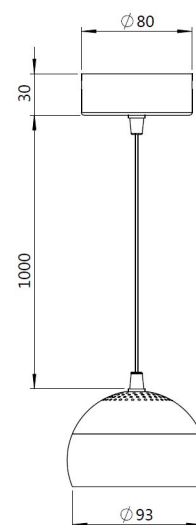

CRI90 36° 3000K



CRI90 36° 3000K




Surface mounted pendant

SLIMFIX ROUND PENDANT L


Light Source	COB LED
Optic	LENS
Wattage [W]	28W
Beam angle [°]	12°/24°/36°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2200lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	Ø 111mm
Weight	0.75kg
Installation	Surface Mounted
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	700mA
Dimming type	ON/OFF

Remark

Suspension cable=1m

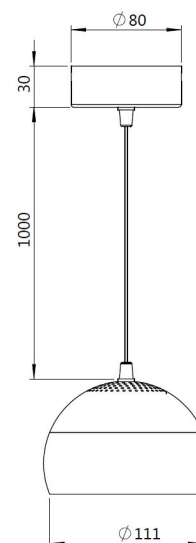

CRI90 24° 3000K





CRI90 24° 3000K

Adjustable surface mounted downlight


SLIMFIX SURFACE MOUNTED DOWNLIGHT S

Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	12°/24°/36°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	355°
Dimensions	H 80mm x Ø 80mm
Weight	0.45kg
Installation	Surface Mounted
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF

Remark

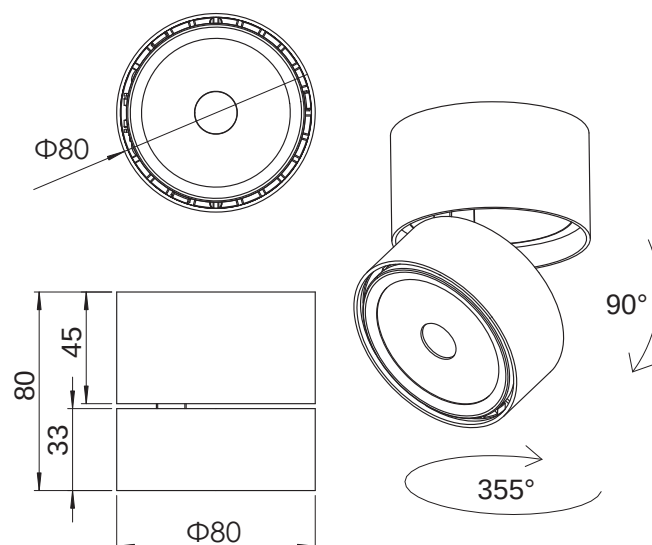

CRI90 24° 3000K





CRI90 24° 3000K

Adjustable surface mounted downlight


SLIMFIX SURFACE MOUNTED DOWNLIGHT M

Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	15°/20°/36°/48°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	355°
Dimensions	H 90mm x Ø 93mm
Weight	0.6kg
Installation	Surface Mounted
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	500mA
Dimming type	ON/OFF

Remark

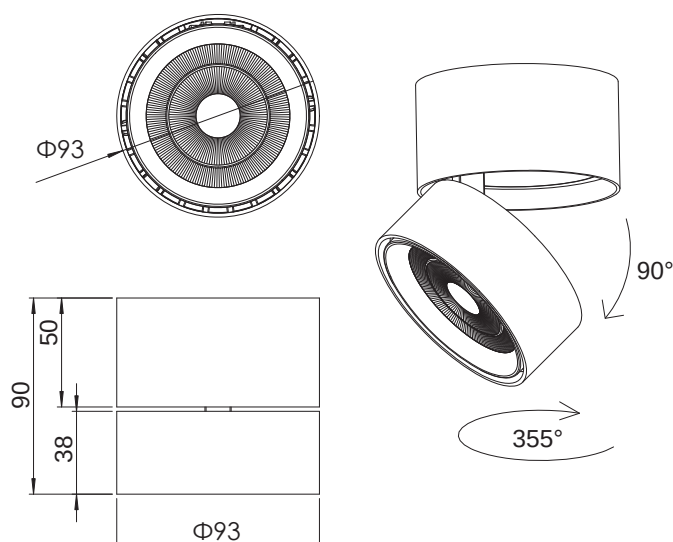

CRI90 20° 3000K



CRI90 20° 3000K

Adjustable Recessed downlight


SLIMFIX RECESSED DOWNLIGHT S

Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	15°/24°/36°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	355
Dimensions	H 44.5mm x Ø 80mm
Weight	0.35kg
Installation	Recessed
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF




Remark




Ø72



Cut hole Ø72-75

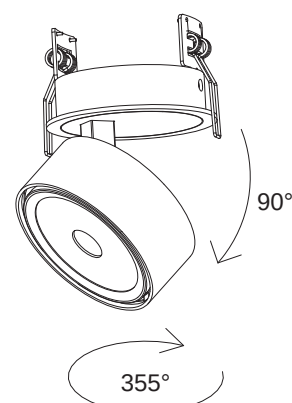

CRI90 24° 3000K



Adjustable Recessed downlight



SLIMFIX RECESSED DOWNLIGHT M

Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	15°/20°/36°/48°/60°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	355
Dimensions	H 49.5mm x Ø 93mm
Weight	0.45kg
Installation	Recessed
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	500mA
Dimming type	ON/OFF


Remark



Ø85

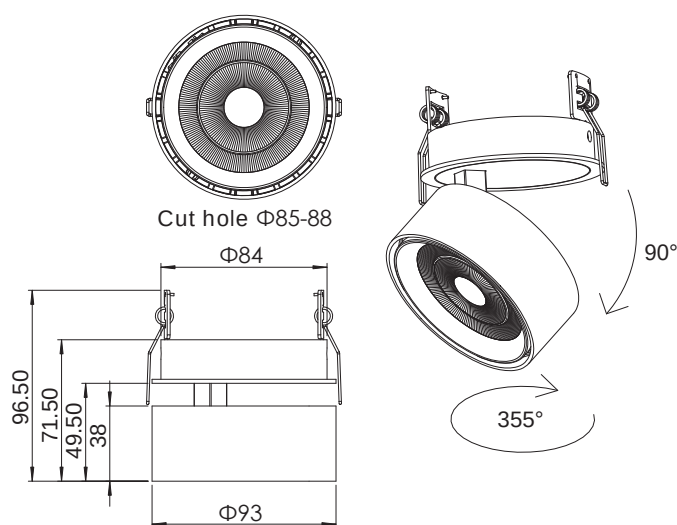

CRI90 20° 3000K



CRI90 20° 3000K

Adjustable Recessed downlight



SLIMFIX RECESSED DOWNLIGHT L

Light Source	COB LED
Optic	LENS
Wattage [W]	28W
Beam angle [°]	15°/24°/36°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2200lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	355
Dimensions	H 56mm x Ø 105mm
Weight	0.55kg
Installation	Recessed
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	700mA
Dimming type	ON/OFF

Remark



Ø105

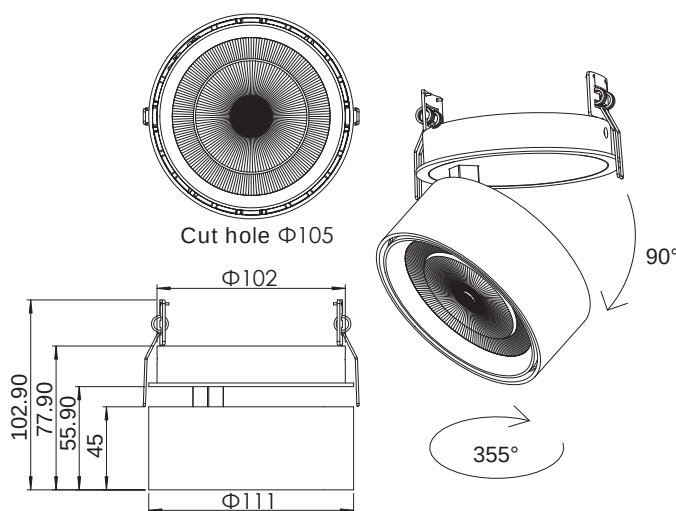

Flux out: 1107 lm


Height	Beam, lmax	Angle: 23.18deg	Diameter
3.281ft 1m	724, 6,1006fc 7799,10829lx		1.346ft 41.02cm
6.562ft 2m	181,1,251,5fc 1950,2707lx		2.692ft 82.05cm
9.843ft 3m	80,51,111,8fc 866,6,1203lx		4.038ft 123.07cm
13.12ft 4m	45,29,62,88fc 487,5,676,8lx		5.384ft 164.10cm
16.4ft 5m	28,38,40,24fc 312,0,433,1lx		6.73ft 205.12cm

Adjustable recessed downlight




SLIMFIX RECESSED SQUARE

Light Source	COB LED
Optic	LENS
Wattage [W]	28W
Beam angle [°]	12°/24°/36°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2200lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-35°
Pan movement	355°
Dimensions	H131mm x W 131mm
Weight	0.6kg
Installation	Recessed
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	700mA
Dimming type	ON/OFF


Remark



Cut hole 120*120mm



CRI90 24° 3000K



CRI90 24° 3000K

ZEPLINN

Unit E, 10/F, Joint Venture Factory Bldg,
76 Hung To Road, Kwun Tong,
Kowloon, Hong Kong
(+852) 2525 7471
info@zeplinn.com

