



EMPOWERED BY PASSION ✨

AXENT

*Cabinet, Millwork &
Precision Ceiling Lighting*



AXENT

Advanced solutions for cabinets, shelves, ceiling and furniture integration of nano and miniaturized lighting fixtures featuring.

High efficiency

Ultra narrow beam precision (4°/6°/10°)

High CRI

Miniatured size

AXENT



MICRO STAR

P.4



DRAGONI

P.5



NEPTUNE

P.6



NANO SPOT

P.7



EYEBALL

P.8



MAXY SPOT

P.9



MAXY TRIMLESS

P.10



XENA

P.11



XENA TRIMLESS

P.12



V-JET

P.13



VISOR

P.14



NANO SURFACE

P.14



NANO W/O BASE

P.15



NANO TRACK

P.16



MINI TRACK

P.17



MINI L TRACK

P.18

AXENT



MAXY TRACK

P.19




MAXY L TRACK

P.20



MAXY RECESSED

P.21



STRING L
1W

P.22



LINX S



P.23



LINX L



P.24



JOA



P.25



NANO SHOWCASE

P.26



MEZZO

P.27



NANO LINE

P.28



ZEPLINE S

P.29



ZEPLINE L

P.30



SHOWCASE LIGHT BAR

P.31



BRIDGE

P.33



RECHARGEABLE DISPLAY
LIGHTS

P.34-38

Micro Recessed downlight


MICRO STAR

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	0.2W
Beam angle [°]	120°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	66.9 lm / 2818 cd
MacAdam Step	3
IP rate	65
Finish	Black / Chrome / Aluminium
Material	Aluminium & Steel
Tilting angle	fixed
Pan movement	fixed
Dimensions	Φ10 x H31mm
Weight	
Installation	Recessed
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC12V/ 24V
Dimming type	ON/OFF / 1-10V

Remark



Φ9

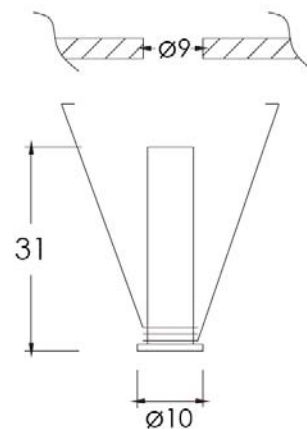


Micro Recessed downlight

DRAGONI

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W
Beam angle [°]	15° / 30° / 45° / 60°
CCT [K]	2700K/3000K/3500K/4000K/6000K
CRI [Ra]	90+
Luminous flux	28lm / 82 cd
MacAdam Step	3
IP rate	65
Finish	Black / Chrome / Aluminium
Material	Aluminium & Steel
Tilting angle	±22°
Pan movement	0-360°
Dimensions	Φ30 x H21mm
Weight	40g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / 1-10V

Remark

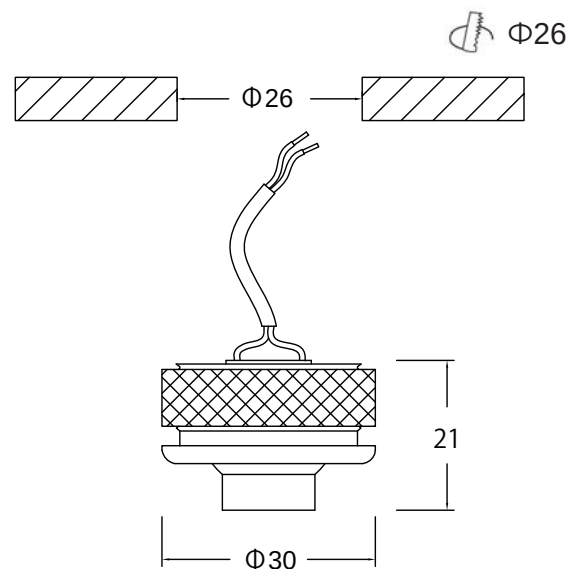


Recessed downlight

NEPTUNE

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W/ 2W
Beam angle [°]	90°
CCT [K]	2700K/3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	177lm / 73 cd
MacAdam Step	3
IP rate	20
Finish	Black / Aluminium
Material	Aluminium & Steel
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	Ø42 x H36mm
Weight	80g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / 1-10V / DALI

Remark


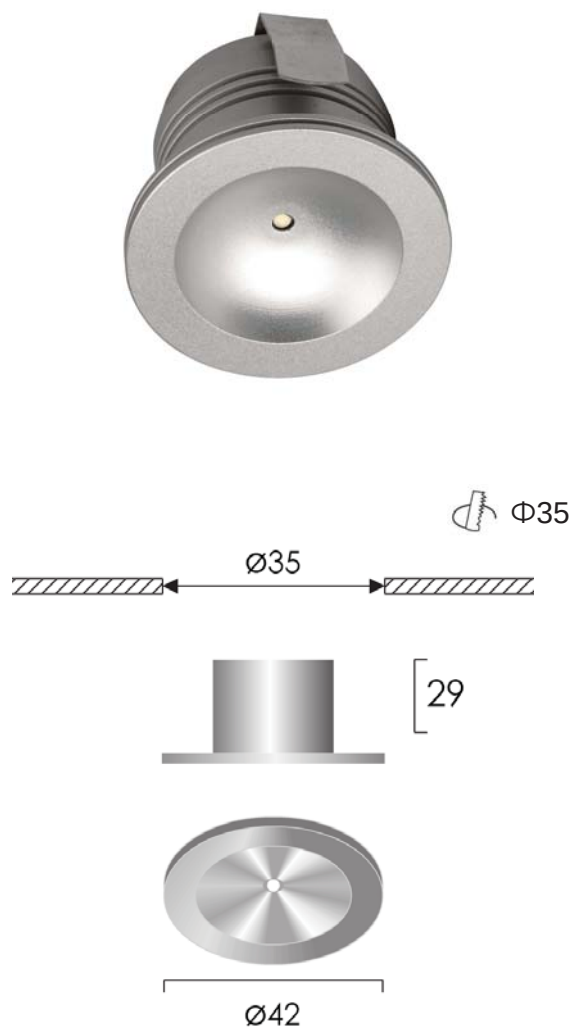


Nano Recessed downlight

NANO SPOT LIGHT

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W / 2W
Beam angle [°]	12° / 15° / 20° / 33°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	66.9lm / 2818 cd
MacAdam Step	3
IP rate	44 - Class III
Finish	Black / White / Custom color*
Material	
Tilting angle	±25°
Pan movement	0-355°
Dimensions	Φ34 x H16mm
Weight	25g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	500mA 2.86VDC
Dimming type	ON/OFF / 1-10V / DALI

Remark

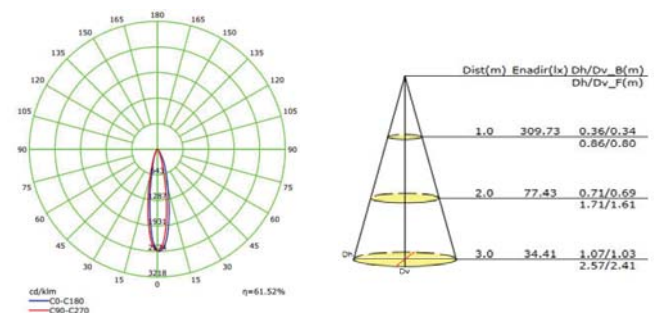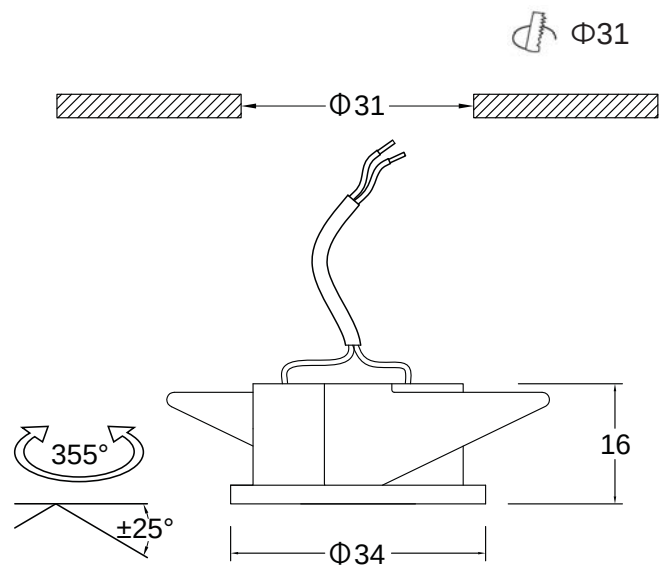



BEAM 12°

Mini Recessed downlight

EYEBALL

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	3W
Beam angle [°]	8° / 10° / 20° / 40° / 60°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	137.5lm / 3567 cd
MacAdam Step	3
IP rate	44 - Class III
Finish	Black / White / Custom color*
Material	
Tilting angle	±25°
Pan movement	0-355°
Dimensions	Φ40 x H30mm
Weight	30g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	700mA 3.00VDC
Dimming type	ON/OFF / 1-10V / DALI

Remark

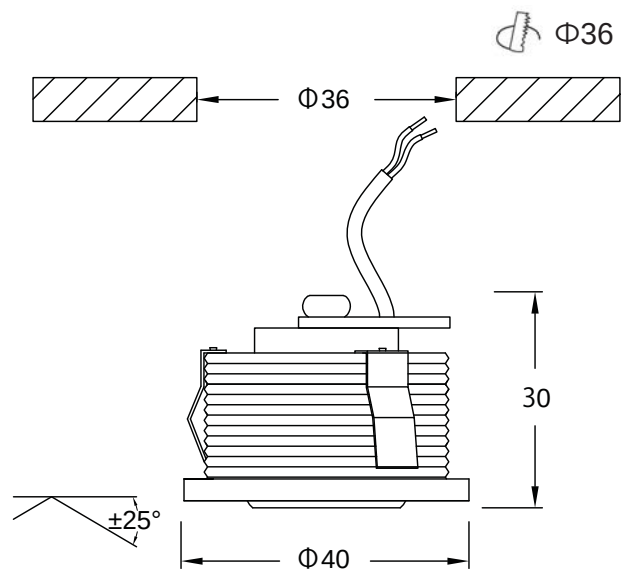

Dist(m)	Enadir(lx)	Dh/Dv_θ(m)	Dh/Dv_F(m)
1.0	1065.69	0.23/0.24	0.56/0.56
2.0	266.42	0.47/0.48	1.12/1.12
3.0	118.41	0.70/0.72	1.67/1.68

BEAM 8°

Mini Recessed downlight




MAXY SPOT LIGHT

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	3W / 4W
Beam angle [°]	6° / 10° / 18° / 34°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	307lm/ 25878 cd
MacAdam Step	3
IP rate	44 - Class III
Finish	Black / White / Custom color*
Material	
Tilting angle	±25°
Pan movement	0-355°
Dimensions	Φ65 x H50mm
Weight	250g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	700mA/ 1050mA
Dimming type	ON/OFF / 1-10V / DALI

Remark



Φ62

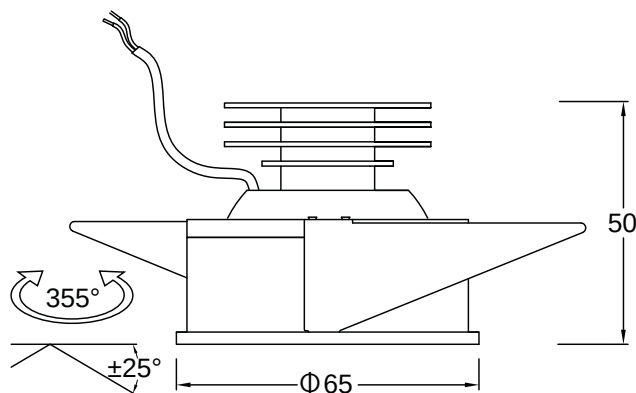

Dist(m)	Enadir(1x)	Dh/Dv_B(m)	Dh/Dv_F(m)
1.0	7848.58	0.13/0.13	0.22/0.22
2.0	1962.14	0.26/0.26	0.45/0.45
3.0	872.06	0.39/0.39	0.67/0.67

BEAM 6°

Mini Recessed Trimless downlight



MAXY SPOT TRIMLESS

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	3W / 4W
Beam angle [°]	6° / 10° / 18° / 34°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	307lm/ 25878 cd
MacAdam Step	3
IP rate	44 - Class III
Finish	Black / White / Custom color*
Material	
Tilting angle	±25°
Pan movement	0-355°
Dimensions	Φ68 x H54mm
Weight	250g
Installation	Recessed Trimless
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	700mA/ 1050mA
Dimming type	ON/OFF / 1-10V / DALI

Remark



Φ70

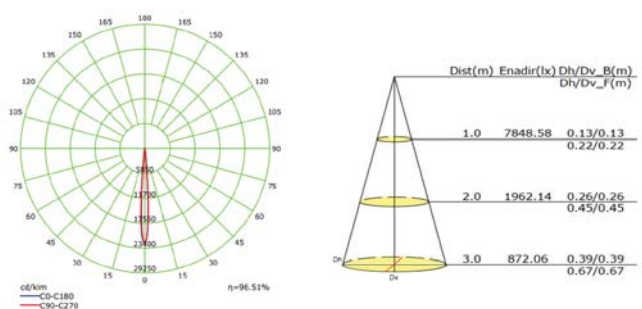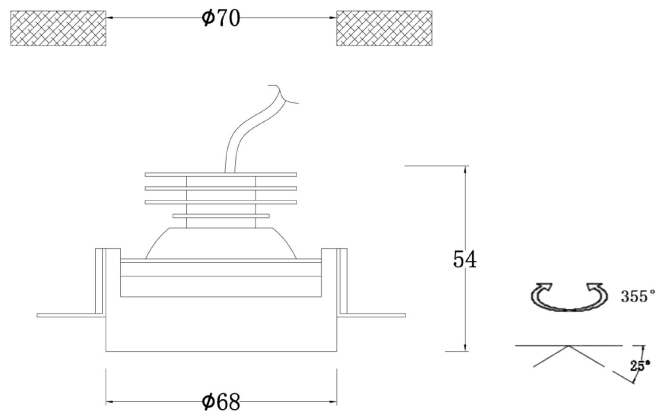


Mini Recessed downlight

XENA





Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	7W/10W
Beam angle [°]	4° / 10°/25°/ 36°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	560lm/ 21983 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±25°
Pan movement	0-355°
Dimensions	Ø85 x H108mm
Weight	300g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	7W 500mA /10W 700mA
Dimming type	ON/OFF / 1-10V / DALI

Remark

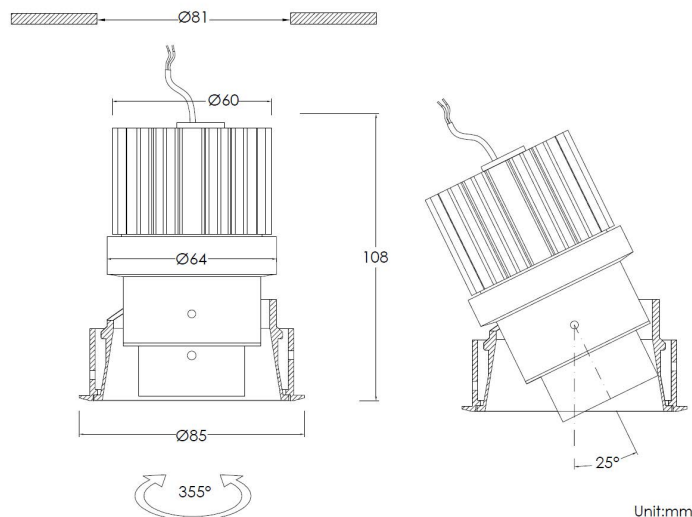

Unit:mm



Beam 10°





Mini Recessed downlight

XENA TRIMLESS



Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	7W/10W
Beam angle [°]	4° / 10°/25°/ 36°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	560lm/ 21983 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±25°
Pan movement	0-355°
Dimensions	Φ117 x H108mm
Weight	300g
Installation	Recessed Trimless
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	7W 500mA /10W 700mA
Dimming type	ON/OFF / 1-10V / DALI

Remark

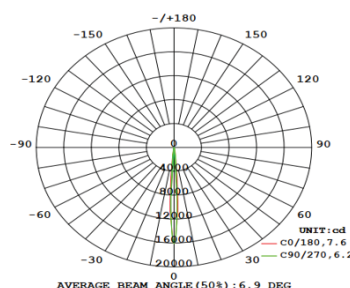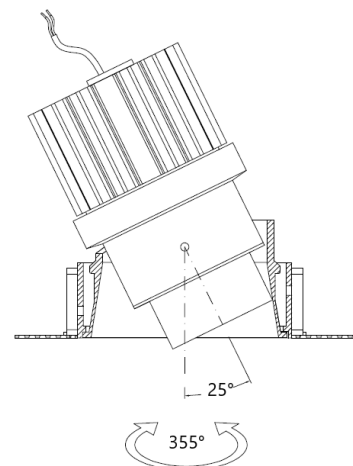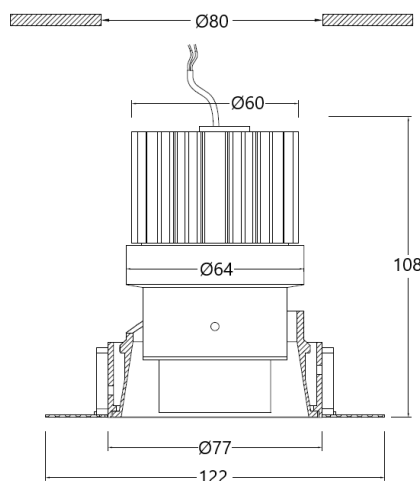

Beam 10°

Micro Recessed downlight

V-JET







Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	7W
Beam angle [°]	4°
CCT [K]	2700K/3000K/5000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	498lm/ 10755 cd
MacAdam Step	3
IP rate	44
Finish	Black / White/ Aluminium
Material	
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	Φ58 x H65mm
Weight	150g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	7W 500mA
Dimming type	ON/OFF / 1-10V / DALI

Remark



Φ53

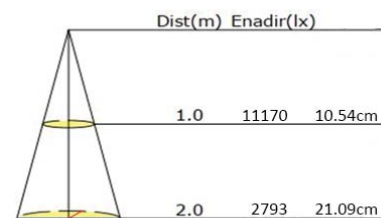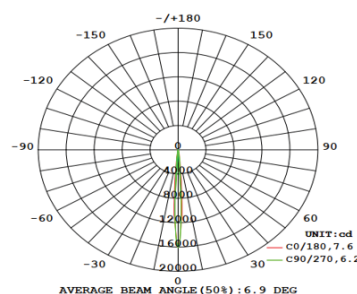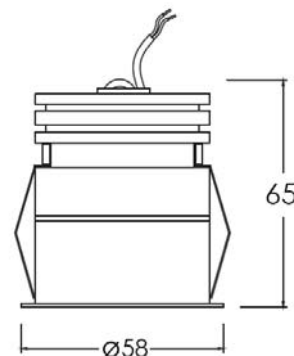

Beam 4°




Recessed Spotlight

VISOR



Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	7W
Beam angle [°]	4°/10°/15°/25°/35°/60°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux	498lm/ 10755 cd
MacAdam Step	3
IP rate	44
Finish	Black / White/ Aluminium
Material	
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Ø51 x H1109mm
Weight	500g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	7W 500mA
Dimming type	ON/OFF / 1-10V / DALI

Remark

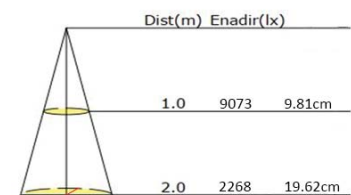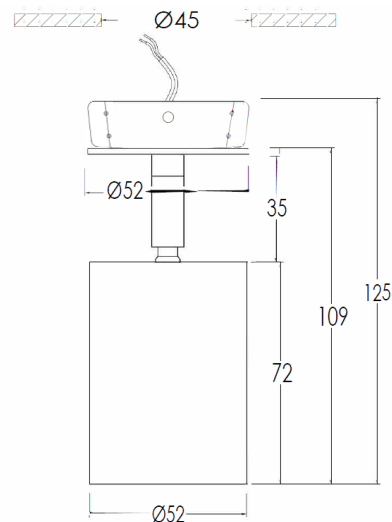


Beam 4°

Nano Surface mounted spotlight

NANO SURFACE


Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W / 2W
Beam angle [°]	12° / 15° / 20° / 30°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	98.9lm/ 2872 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Φ17 x H46mm
Weight	20g
Installation	Surface mounted
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	350mA/ 500mA
Dimming type	ON/OFF / 1-10V / DALI

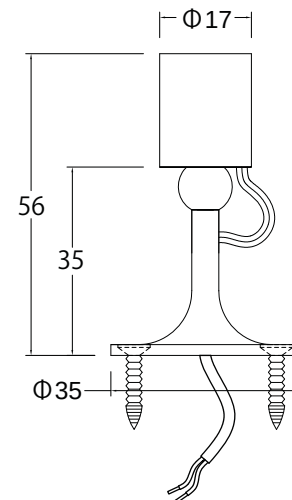

Remark



Luminous Intensity Distribution Curve(cd/klm)




Dist(m)	Enadir(°)	Dh/Dv_0(m)	Dh/Dv_F(m)
1.0	309.73	0.36/0.34	0.86/0.80
2.0	77.43	0.71/0.69	1.71/1.61
3.0	34.41	1.07/1.03	2.57/2.41

BEAM 12°

Nano Surface mounted spotlight

NANO SURFACE W/O BASE


Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W / 2W
Beam angle [°]	12° / 15° / 20° / 30°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	98.9lm/ 2872 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Φ17 x H46mm
Weight	20g
Installation	Surface mounted
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	350mA/ 500mA
Dimming type	ON/OFF / 1-10V / DALI

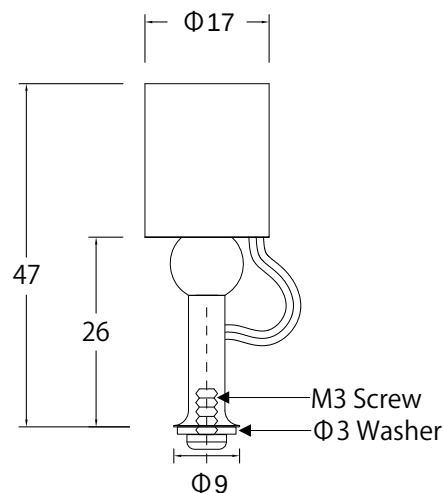

Remark



Luminous Intensity Distribution Curve(cd/klm)



Dist(m)	Enadir(°)	Dh/Dv_B(m)	Dh/Dv_F(m)
1.0	371.30	0.43/0.42	0.85/0.86
2.0	92.83	0.85/0.85	1.70/1.73
3.0	41.26	1.28/1.27	2.55/2.59


BEAM 12°

Magnetic Nano Tracklight


NANO TRACK

Light Source	COB LED
Optic	LENS
Wattage [W]	1.5W
Beam angle [°]	12° / 15° / 20° / 30°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	98.9lm/ 2782 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Φ17 x H61.5mm
Weight	20g
Installation	Magnetic track mounted
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	24VDC
Dimming type	ON/OFF


Remark

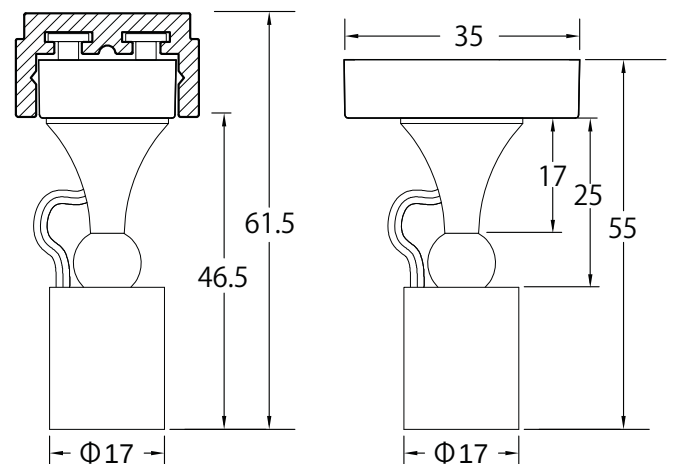

Magnetic Track Rail Accessories

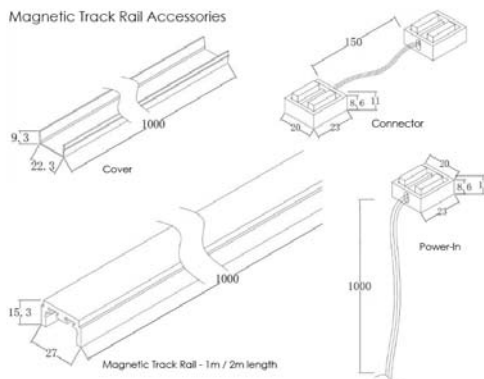

Luminous Intensity Distribution Curve(cd/klm)





BEAM 12°

Magnetic Mini Tracklight


MINI TRACK

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	3W
Beam angle [°]	10° / 20° / 40° / 60°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	158.3lm / 6659 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Φ31x H75mm
Weight	35g
Installation	Magnetic track mounted
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF

Remark

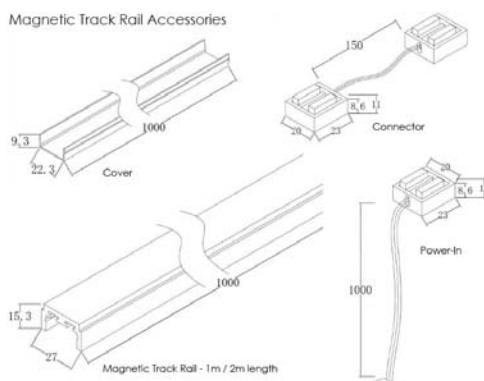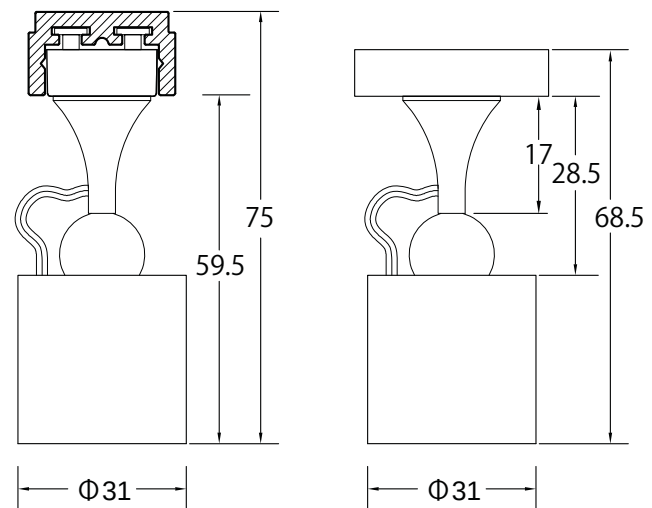

Luminous Intensity Distribution Curve(cd/kim)




Dist(m)	Enadir(°)	Dy/Dv_B(m)	Dv/Dv_F(m)
1.0	1456.72	0.24/0.24	0.47/0.47
2.0	364.18	0.48/0.48	0.94/0.94
3.0	161.86	0.72/0.72	1.41/1.40

BEAM 10°

Magnetic Mini Tracklight (L Shape for Cove Lighting)


MINI L TRACK

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	3W
Beam angle [°]	10° / 20° / 40° / 60°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	158.3lm / 6659 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Φ31x H75mm
Weight	30g
Installation	Magnetic track mounted
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF

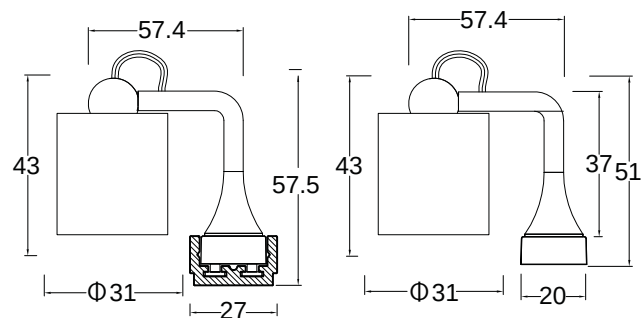


Remark

Magnetic Track Rail Accessories

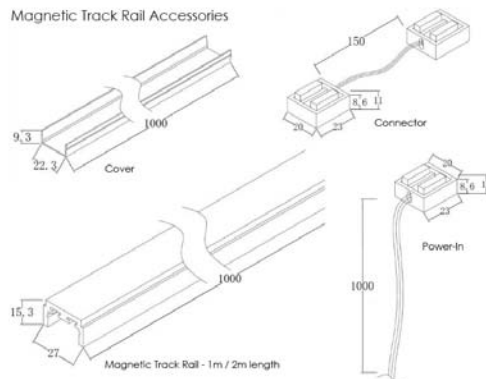

Luminous Intensity Distribution Curve(cd/kim)



Dist(m)	Enadir(°)	Dy/Dv_B(m)	Dv/Dv_F(m)
1.0	1456.72	0.24/0.24	0.47/0.47
2.0	364.18	0.48/0.48	0.94/0.94
3.0	161.86	0.72/0.72	1.41/1.40


BEAM 10°

Magnetic Mini Tracklight




MAXY TRACK

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	3.5W
Beam angle [°]	6° / 10° / 18° / 34°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	262.2lm / 6770 cd
MacAdam Step	3
IP rate	20
Finish	Black / White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Φ43 x H126.5mm
Weight	90g
Installation	Magnetic track mounted
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF

Remark

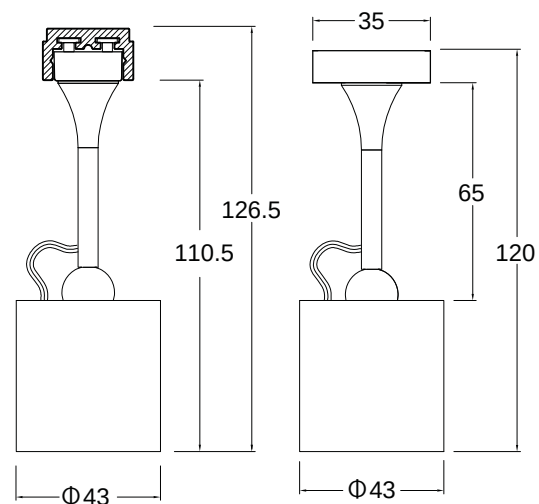

Magnetic Track Rail Accessories

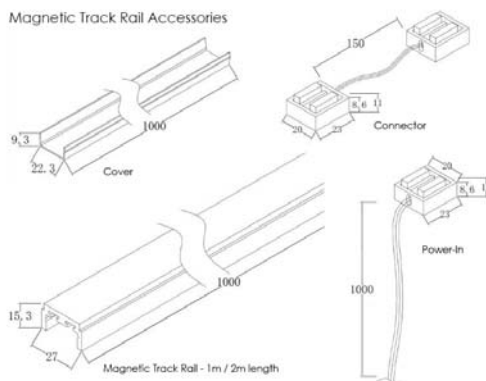

BEAM 6°




Recessed Mini Spotlight

MAXY Recessed


with mounting parts

Light Source	COB LED
Optic	LENS
Wattage [W]	3W/4W
Beam angle [°]	6° / 10° / 18° / 34°
CCT [K]	2700K/3000K/3500K/4000K/6000K
CRI [Ra]	90+
Luminous flux [lm]	262.2lm / 6770 cd
MacAdam Step	3
IP rate	20
Finish	Black/ White / Custom color*
Material	
Tilting angle	±90°
Pan movement	360°
Dimensions	Ø 43 x H126.5mm
Weight	90g
Installation	Recessed
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF

Remark

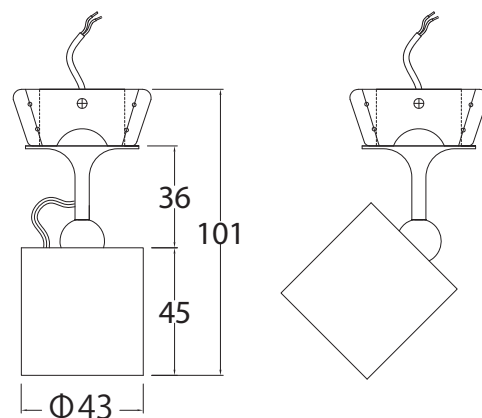

BEAM 6°




BEAM 6°

Showcase Pole light

STRING L

Light Source	SMD LED
Optic	Diffuser
Wattage [W]	2W
Beam angle [°]	100°
CCT [K]	2700K/3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	188lm/ 50 cd
MacAdam Step	3
IP rate	20
Finish	Black/ Aluminium/ Chrome
Material	Aluminium & Steel
Tilting angle	0-45°
Pan movement	0-355°
Dimensions	Φ6 x H350mm
Weight	130g
Installation	Recessed
Driver	Remote
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / 1-10V

Remark

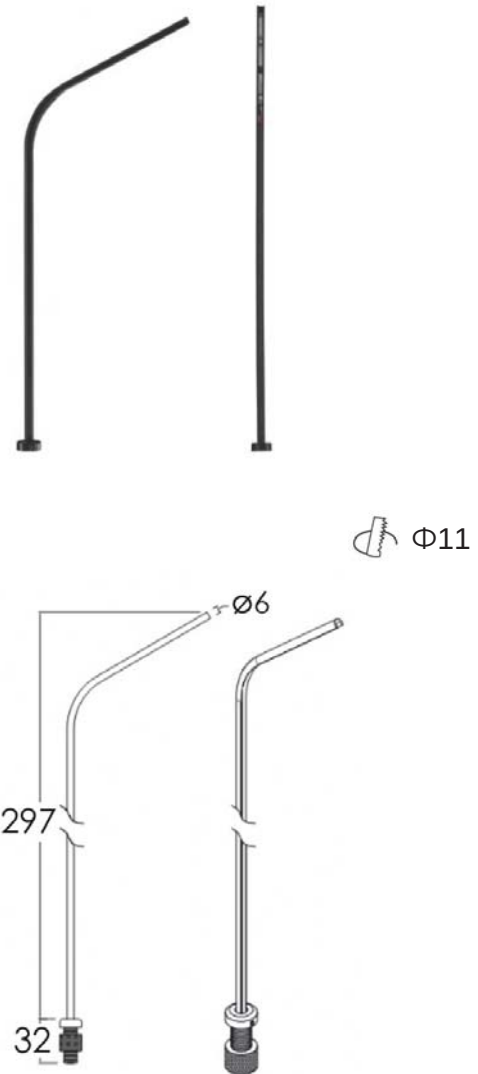


Showcase Pole light

LINX S

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W
Beam angle [°]	20°/ 40°/ 60°
CCT [K]	2700K/ 3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	188lm/ 380 cd
MacAdam Step	3
IP rate	44
Finish	Chrome/ Custom color*
Material	Aluminium & Steel
Tilting angle	0-45°
Pan movement	0-355°
Dimensions	Φ20 x H300mm
Weight	70g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF / 1-10V

Remark

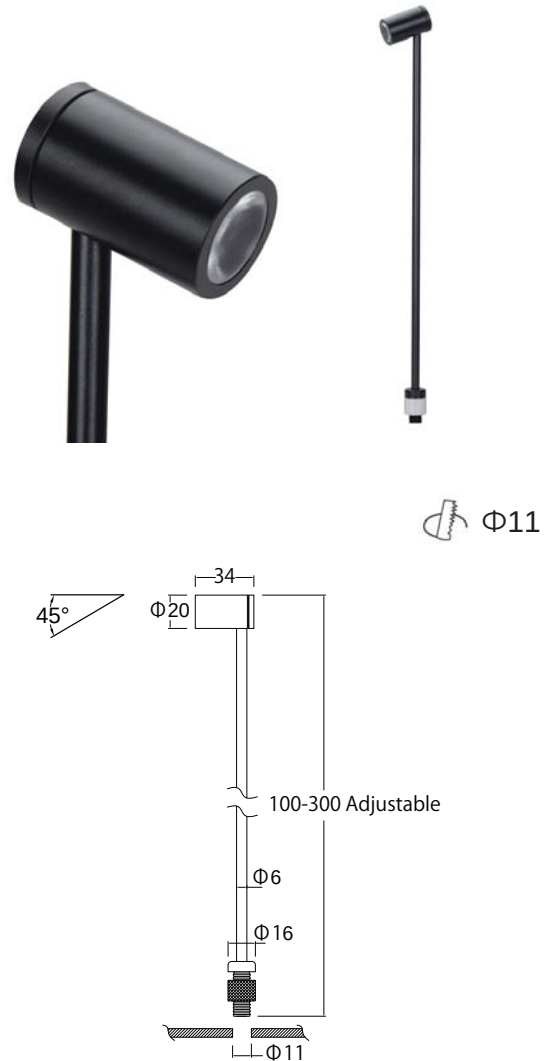


Showcase Pole light

LINX L

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	2W
Beam angle [°]	20° / 40° / 60°
CCT [K]	3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	109lm / 380 cd
MacAdam Step	3
IP rate	44
Finish	Chrome/ Custom color*
Material	Aluminium & Steel
Tilting angle	0-40°
Pan movement	0-355°
Dimensions	Φ34 x H300mm
Weight	70g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / 1-10V

Remark

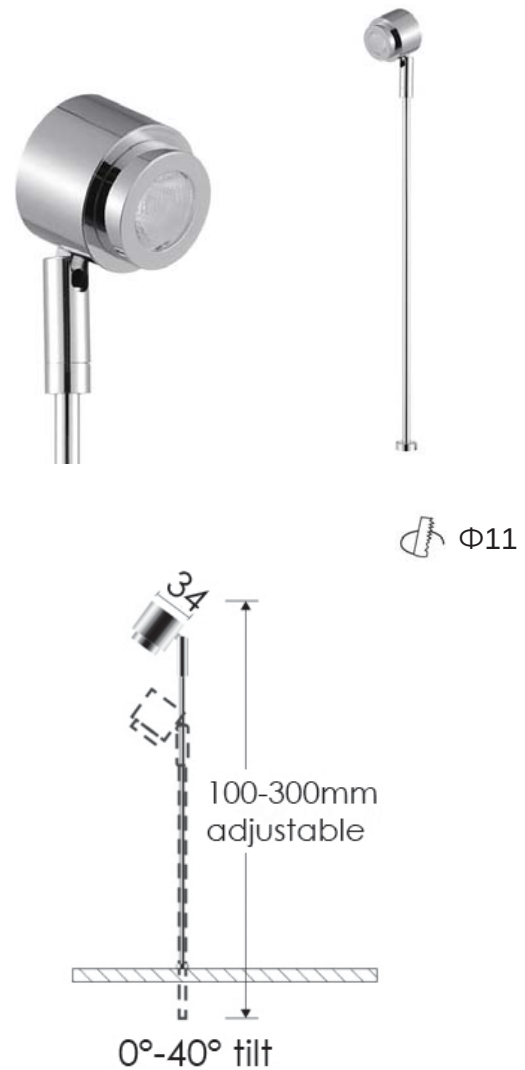


Showcase Pole light

JOA

Light Source	INTEGRAL LED
Optic	Reflector
Wattage [W]	3x1W
Beam angle [°]	20°/ 40°/ 60°
CCT [K]	2700K/ 3000K/3500K/4000K/6000K
CRI [Ra]	90+
Luminous flux	187lm/ 109 cd
MacAdam Step	3
IP rate	20
Finish	Black/ Aluminium/ Polish
Material	Aluminium & Steel
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ18 x H300mm
Weight	80g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / 1-10V

Remark

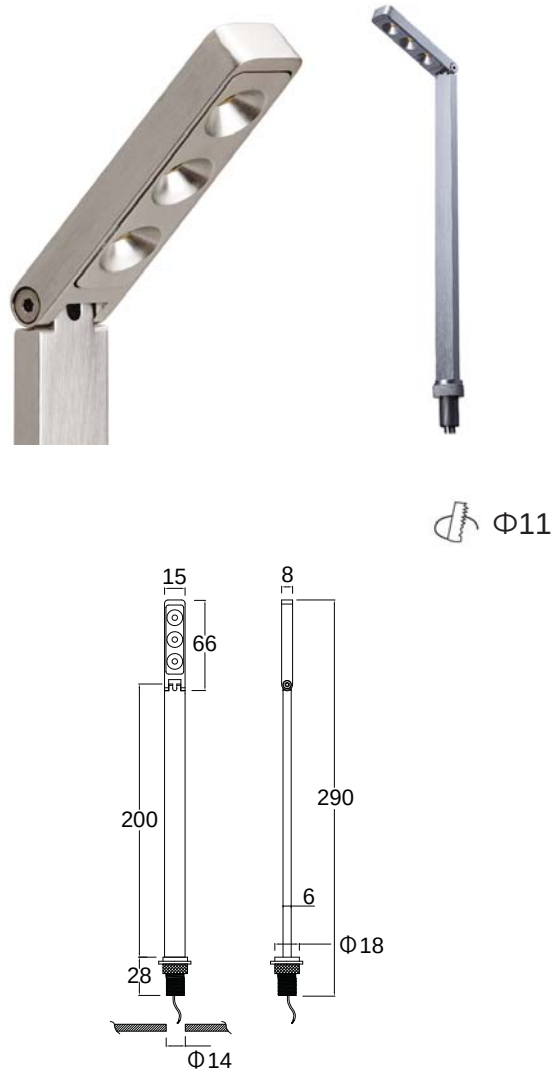

Showcase Pole light




NANO SHOWCASE

Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W/ 2x1W/ 3X1W/ 5X1W
Beam angle [°]	15°/ 30°/ 45°/ 60°
CCT [K]	2700K/ 3000K/3500K/4000K/6000K
CRI [Ra]	90+
Luminous flux	78lm/ head / 261 cd / head
MacAdam Step	3
IP rate	20
Finish	Black/ Polish/ Custom color*
Material	Aluminium & Steel
Tilting angle	0-90°
Pan movement	0-180°
Dimensions	Φ17 x H350.5mm
Weight	80g
Installation	Recessed
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / 1-10V

Remark



 $\Phi 16$

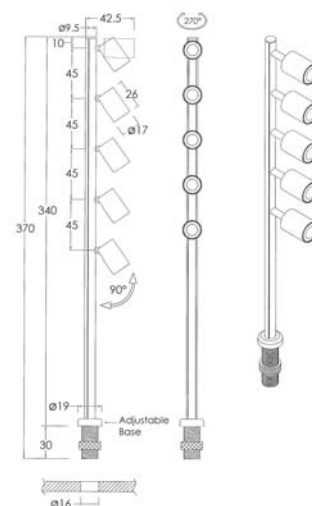


Shelf Linear spotlight

MEZZO

Light Source	COB LED
Optic	Lens
Wattage [W]	2x1.5W
Beam angle [°]	15°/ 30°/ 45°
CCT [K]	2700K/3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	225lm/ 878 cd
MacAdam Step	3
IP rate	20
Finish	Black/ Aluminium
Material	Aluminium & Steel
Tilting angle	0-30°
Pan movement	0-355°
Dimensions	L150 x W14 x H35mm
Weight	70g
Installation	mounted on channel
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF / 1-10V

Remark

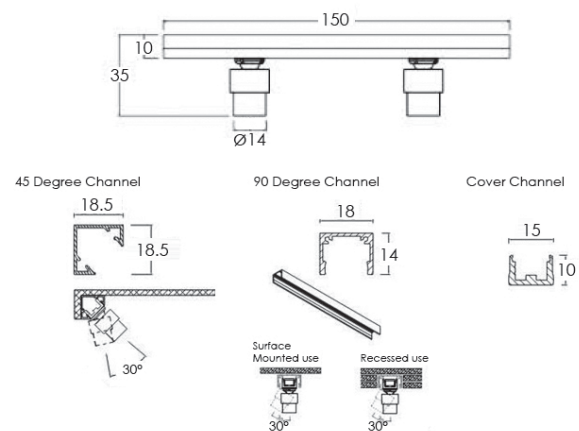


Linear Accent Light

NANO LINE 75




Light Source	INTEGRAL LED
Optic	LENS
Wattage [W]	1W/chip
Beam angle [°]	16° / 30°
CCT [K]	2700K/ 3000K/ 3500K/ 4000K
CRI [Ra]	90+
Luminous flux	346.9 lm / 2581 cd (for 303mm)
MacAdam Step	3
IP rate	20
Finish	Aluminium
Material	
Tilting angle	±30°
Pan movement	
Dimensions	Length x W15 x H17mm
Weight	
Installation	Mounting clip
Driver	Remoted, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	Listed below
Dimming type	ON/OFF / 1-10V / DALI

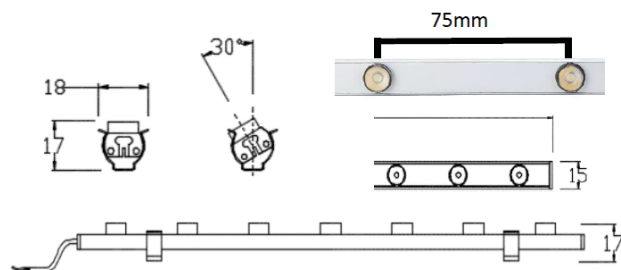

Remark

Power	Current	Forward Voltage[V]	Size
2 x 1W	350mA	5.72V	L153 x W15 x H17 mm
3 x 1W	350mA	8.58V	L228 x W15 x H17 mm
4 x 1W	350mA	11.44V	L303 x W15 x H17 mm
5 x 1W	350mA	14.30V	L378 x W15 x H17 mm
6 x 1W	350mA	17.16V	L453 x W15 x H17 mm
7 x 1W	350mA	20.02V	L528 x W15 x H17 mm
8 x 1W	350mA	22.88V	L603 x W15 x H17 mm
10 x 1W	350mA	28.60V	L753 x W15 x H17 mm
12 x 1W	350mA	34.32V	L903 x W15 x H17 mm

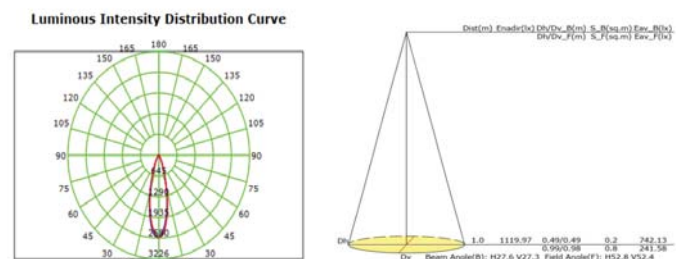

BEAM 16°


High Power LED Linear Light

ZEPLINE S

Light Source	SMD 2216 350LEDs/M
Optic	Diffuser
Wattage [W]	18W/m
Beam angle [°]	120°
CCT [K]	2700K/3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	1700lm/m
MacAdam Step	3
IP rate	20
Finish	Black/ Aluminium
Material	Aluminium & Steel
Tilting angle	±25°
Pan movement	
Dimensions	Ø9.4 x Length*
Weight	
Installation	Recessed / Surface Mounted
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF / 1-10V / DALI

Remark


*Length can be custom-made on demand

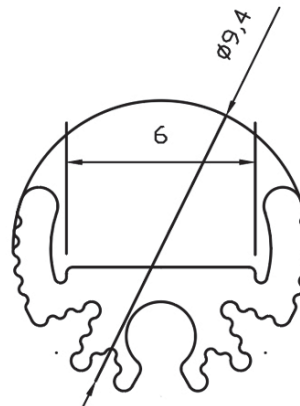

High Power LED Linear Light

ZEPLINE L

Light Source	SMD 5630 224LEDs/M
Optic	Diffuser
Wattage [W]	30W/m
Beam angle [°]	120°
CCT [K]	2700K/3000K/3500K/4000K/6000K
CRI [Ra]	90+
Luminous flux	3900lm/m
MacAdam Step	3
IP rate	20
Finish	Black/ Aluminium
Material	Aluminium & Steel
Tilting angle	±25°
Pan movement	
Dimensions	Φ16.2 x Length*
Weight	
Installation	Recessed / Surface Mounted
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF / 1-10V / DALI

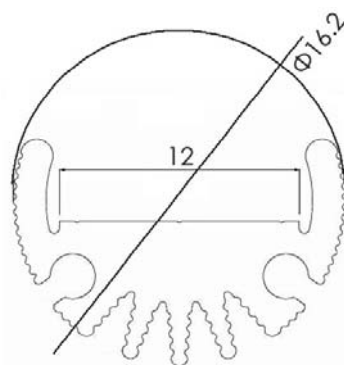

Remark

*Length can be custom-made on demand




Linear lightbar

SHOWCASE LIGHT BAR

Light Source	COB LED
Optic	LENS
Wattage [W]	7W
Beam angle [°]	6°/20°/40°/60°/10x50°/6x70°/9x70°
CCT [K]	2700K/3000K/3500K/4000K/6000K
CRI [Ra]	80+ / 90+
Luminous flux	1241lm
MacAdam Step	3
IP rate	44
Finish	Aluminium
Material	
Tilting angle	±25°
Pan movement	
Dimensions	Length x W29.5 x H48mm
Weight	
Installation	Surface Mounted
Driver	Remote, Constant Current
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF, 1-10V, DALI

Remark

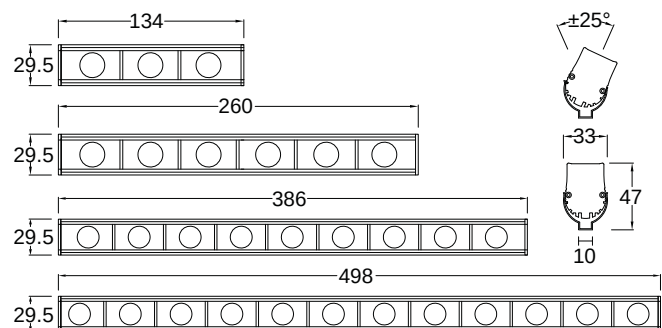

Showcase Bridge


BRIDGE SERIES

Light Source	SMD LED
Optic	Diffuser
Wattage [W]	5W/ 7W/ 10W
Beam angle [°]	120°
CCT [K]	2700K/3000K/4000K/6000K
CRI [Ra]	90+
Luminous flux	515lm
MacAdam Step	3
IP rate	20
Finish	Black/ Aluminium
Material	Aluminium & Steel
Tilting angle	0-45°
Pan movement	0-355°
Dimensions	Φ11 x H500mm x L
Weight	
Installation	Recessed
Driver	Remote, Constant Voltage
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF / 1-10V / DALI

Remark



Φ11

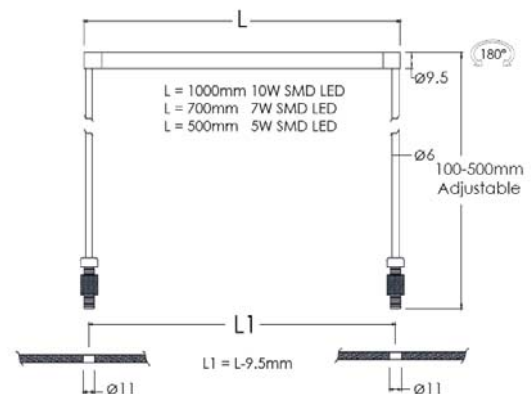

Rechargeable Display Light

Rechargeable Display Light

Light Source	CREE
Optic	Lens
Wattage [W]	3W
Beam angle [°]	15°/30°/45°/60°
CCT [K]	3000K/3500K/4000K/5000K/6000K
CRI [Ra]	90+
Luminous flux [lm]	200lm
MacAdam Step	3
IP rate	20
Finish	Black, Silver and Custom color
Material	Aluminium
Tilting angle	±100° to 180°
Pan movement	
Dimensions	H 400mm x Head Length 61mm
Weight	
Installation	Surface Mounted
Driver	N/A
Driver Input	Rechargeable battery
Driver Output	DC12V
Dimming type	ON/OFF

Remark

Special height upon request

Max height recommended in 600mm

Dimensions for the battery base: 80 x 80 x 31mm



Rechargeable Display Light - ZOOMABLE

Zoombale Rechargeable Display Light

Light Source	CREE XP-E
Optic	Lens
Wattage [W]	3W
Beam angle [°]	Zoomable 30°-60°
CCT [K]	3000K/3500K/4000K/5000K/6000K
CRI [Ra]	90+
Luminous flux [lm]	200lm
MacAdam Step	3
IP rate	20
Finish	Black, Silver and Custom made
Material	Aluminium
Tilting angle	±100° to 180°
Pan movement	
Dimensions	H 420mm x Head Length 58mm
Weight	
Installation	Surface Mounted
Driver	N/A
Driver Input	Rechargeable battery
Driver Output	DC12V
Dimming type	ON/OFF

Remark

Special height upon request

Max height recommended in 600mm

Dimensions for the battery base: 80 x 80 x 31mm



Rechargeable Display Light

Rechargeable Display Light

3 Heads (3x1W)

Light Source	CREE XP-E
Optic	Lens
Wattage [W]	3W
Beam angle [°]	15°/30°/45°/60°
CCT [K]	3000K/3500K/4000K/5000K/6000K
CRI [Ra]	90+
Luminous flux [lm]	200lm
MacAdam Step	3
IP rate	20
Finish	Black, Silver and Custom made
Material	Aluminum
Tilting angle	±100° to 180°
Pan movement	
Dimensions	H 400mm x Head Length 12mm
Weight	
Installation	Surface Mounted
Driver	N/A
Driver Input	Rechargeable battery
Driver Output	DC12V
Dimming type	ON/OFF

Remark

Special height upon request

Max height recommended in 600mm

Dimensions for the battery base: 80 x 80 x 31mm



Rechargeable Display Light

Rechargeable Display Light

Light Source	CREE-XML-T6
Optic	Lens
Wattage [W]	3W
Beam angle [°]	15°/30°/45°/60°
CCT [K]	3000K/3500K/4000K/5000K/6000K
CRI [Ra]	90+
Luminous flux [lm]	240lm
MacAdam Step	3
IP rate	20
Finish	Black, Silver and Custom made
Material	Aluminum
Tilting angle	±100° to 180°
Pan movement	
Dimensions	H 420mm x Head Length 18mm
Weight	
Installation	Surface Mounted
Driver	N/A
Driver Input	Rechargeable battery
Driver Output	DC12V
Dimming type	ON/OFF

Remark

Special height upon request

Max height recommended in 600mm

Dimensions for the battery base: 80 x 80 x 31mm



Rechargeable Display Light - ROLLING FLUSH

Rolling Flush Display Rechargeable Light

Light Source	CREE XP-E
Optic	Lens
Wattage [W]	3W
Beam angle [°]	15°/30°/45°/60°
CCT [K]	3000K/3500K/4000K/5000K/6000K
CRI [Ra]	90+
Luminous flux [lm]	200lm
MacAdam Step	3
IP rate	20
Finish	Black, Silver and Custom made
Material	Aluminum
Tilting angle	±100° to 180°
Pan movement	
Dimensions	H 420mm x Head Length 45mm
Weight	
Installation	Surface Mounted
Driver	N/A
Driver Input	Rechargeable battery
Driver Output	DC12V
Dimming type	ON/OFF

Remark

Special height upon request

Max height recommended in 600mm

Dimensions for the battery base: 80 x 80 x 31mm





ZEPLINN

Unit E, 10/F, Joint Venture Factory Bldg,
76 Hung To Road, Kwun Tong,
Kowloon, Hong Kong
(+852) 2525 7471
info@zeplinn.com

