



EMPOWERED BY PASSION ✨

TRACKLIGHTS



TRACKLIGHTS

OUR TRACK LIGHTS FEATURE

Integrated Design

Compact Size

Latest lens technology

Perfect glare control optics

High CRI

Best Lighting for retail shops, showrooms, public buildings and museums.

Ideal choice for both accent and general lighting applications



ELIOS (24V/48V)
10W/ 15W/ 20W

P.3-5



JERI XS
15W

P.6



JERI S/M
20W/ 25W

P.7-8



JERI L/XL
30W/ 35W

P.9-10



JERI Wallwasher
30W

P.11



JERI XS Recessed
15W/ 25W

P.12-13



JERI XS Surface
15W/ 25W

P.14-15



BRIO L
28W

P.16



Zepstar S/M
20W/ 25W

P.17-18



Berlin
15W/ 20W/ 30W

P.19-21



Berlin Zoomable
10W/ 15W

P.22-23



Dublin XS/S/M/L
10W/ 15W/ 20W/ 30W

P.24-25



Visio S/M/L
15W/ 20W/ 30W

P.26-30




Devon
23W/27W/35W

P.31-33



Devon Zoom
23W/27W/35W

P.34-39

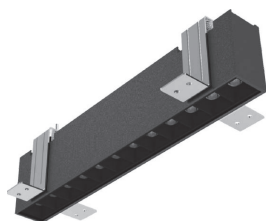

ZEPSTRING Rec. Linear
15W/ 30W/ 40W
P.31



ZEPSTRING FOCUS MINI
10W
P.32



ZEPSTRING WIDE
15W/ 30W/ 40W
P.33



ZEPSTRING Focus Solo
15W/ 30W/ 40W
P.34



ZEPSTRING Focus Duo
30W/ 60W/ 80W
P.35



ZEPSTRING Wallwasher
15W/ 30W/ 40W
P.36



ZEPSTRING Adj. Panel
44W
P.37



ZEPSTRING Panel
70W
P.38


Adjustable Track Light

ELIOS S



Light Source	COB LED
Optic	LENS
Wattage [W]	10W
Beam angle [°]	4°/10°/25°/36°
CCT [K]	2700K/3000K/3500K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ51mm x H 101mm
Weight	
Installation	DC Track mounted
Driver	Remoted
Driver Input	220V-240V 50-60Hz
Driver Output	DC48V
Dimming type	ON/OFF / 1-10V

Remark

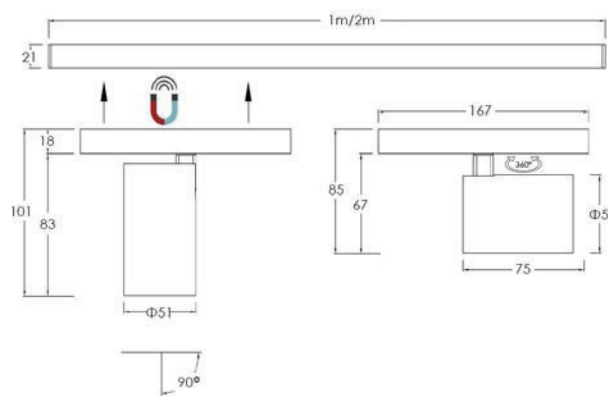

Elios Magnetic track rail system 48V




Adjustable Track Light

ELIOS M



Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	10°/23°/38°
CCT [K]	2700K/3000K/3500K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ42mm x H 90mm
Weight	
Installation	Track mounted
Driver	Remoted
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V/ DC48V
Dimming type	ON/OFF / 1-10V

Remark

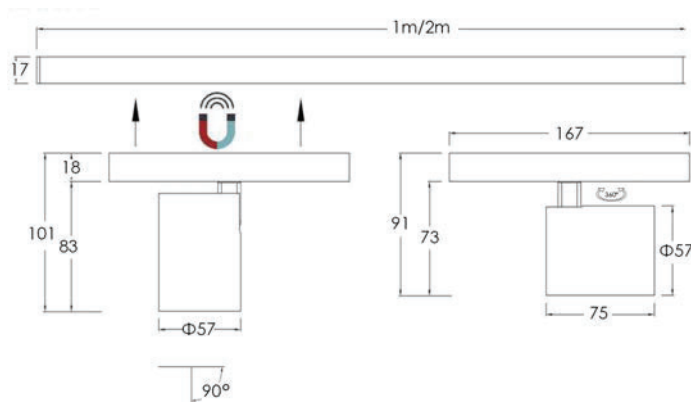

Elios Magnetic track rail system 24/48V




Adjustable Track Light

ELIOS L



Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	10°/23°/36°
CCT [K]	2700K/3000K/3500K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ42mm x H 90mm
Weight	
Installation	Track mounted
Driver	Remoted
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V/ DC48V
Dimming type	ON/OFF / 1-10V

Remark

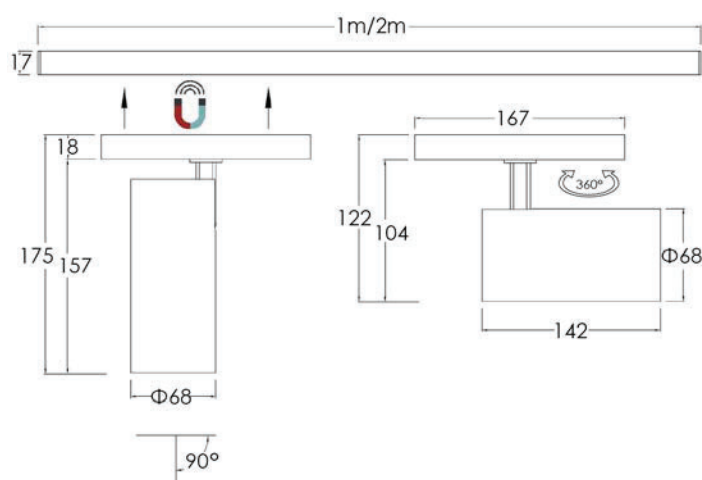

Elios Magnetic track rail system 24/48V





Adjustable Track Light

JERI XS

Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	16°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1200lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ62mm x H 177mm
Weight	0.640 kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF / Triac
Packaging	415x415x305mm, 25pcs/CTN

Remark

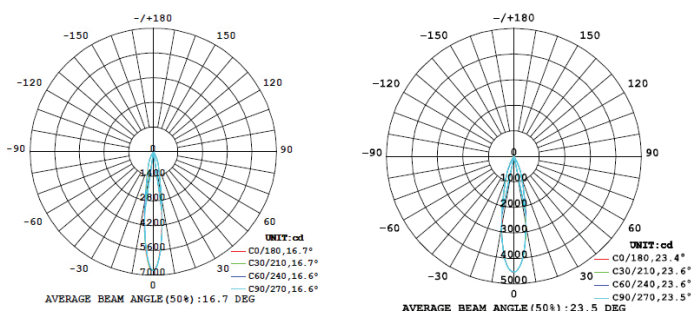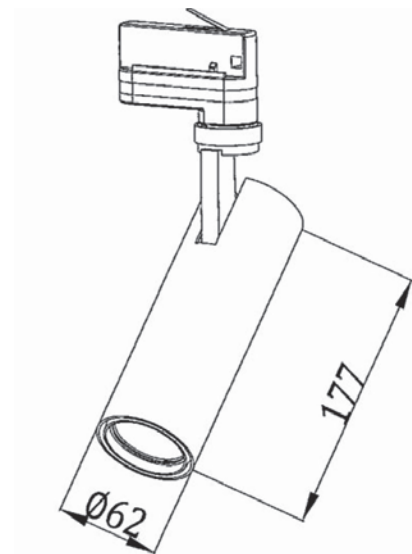

3000K 16deg

3000K 24deg

Zeplinn reserves the right to make technical & design changes without notice

H(m)	E _{max}	D(m)	H(m)	E _{max}	D(m)
1m	6763lx	0.29m	1m	4539lx	0.42m
2m	1691lx	0.58m	2m	1135lx	0.83m
3m	752lx	0.87m	3m	504lx	1.25m
4m	423lx	1.17m	4m	284lx	1.66m
5m	271lx	1.46m	5m	182lx	2.08m

3000K 16deg

3000K 24deg



Zeplinn™ 2020

Adjustable Track Light


JERI S

Light Source	COB LED
Optic	LENS
Wattage [W]	20W
Beam angle [°]	12°/24°/45°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ82mm x H 175mm
Weight	0.83kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	500mA
Dimming type	ON/OFF / Triac
Packaging	515x415x305mm, 20pcs/CTN

Remark

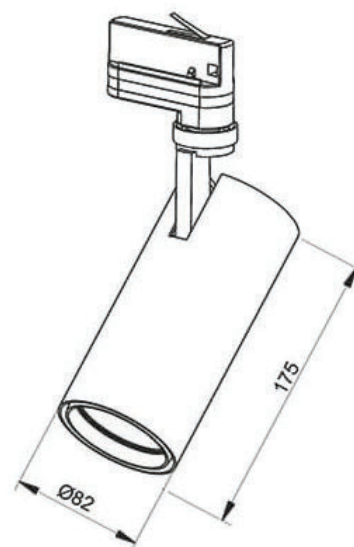

3000K 12deg



3000K 24deg

Zeplinn reserves the right to make technical & design changes without notice

H(m)	E _{max}	D(m)	H(m)	E _{max}	D(m)
1m	16925lx	0.21m	1m	4539lx	0.42m
2m	3069lx	0.42m	2m	1135lx	0.83m
3m	1881lx	0.63m	3m	504lx	1.25m
4m	1058lx	0.84m	4m	284lx	1.66m
5m	677lx	1.05m	5m	182lx	2.08m

3000K 12deg

3000K 24deg



Zeplinn™ 2020

Adjustable Track Light


JERI M

Light Source	COB LED
Optic	LENS
Wattage [W]	25W
Beam angle [°]	12°/24°/45°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1921lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ82mm x H 175mm
Weight	0.83kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	ON/OFF / Triac
Packaging	515x415x305mm, 20pcs/CTN

Remark

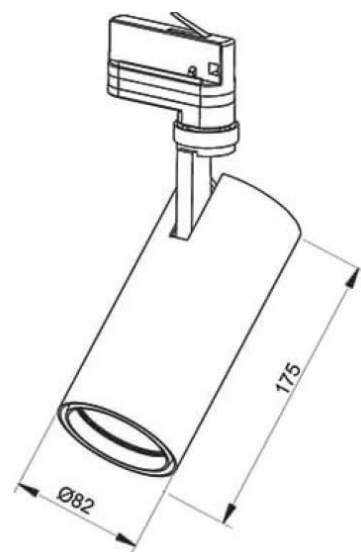

3000K 12 deg



3000K 17deg

Zeplinn reserves the right to make technical & design changes without notice

H(m)	E max	D(m)
1m	24759lx	0.22m
2m	6190lx	0.45m
3m	2751lx	0.67m
4m	1547lx	0.89m
5m	990lx	1.11m

3000K 12 deg

H(m)	E max	D(m)
1m	19353lx	0.29m
2m	4838lx	0.58m
3m	2150lx	0.87m
4m	1210lx	1.16m
5m	774lx	1.44m

3000K 17deg




Zeplinn™ 2020

Adjustable Track Light

JERI L

Light Source	COB LED
Optic	LENS
Wattage [W]	30W
Beam angle [°]	17°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2500lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ96mm x H 180mm
Weight	2kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	700mA
Dimming type	ON/OFF / Triac
Packaging	670x500x350mm, 6pcs/CTN

Remark

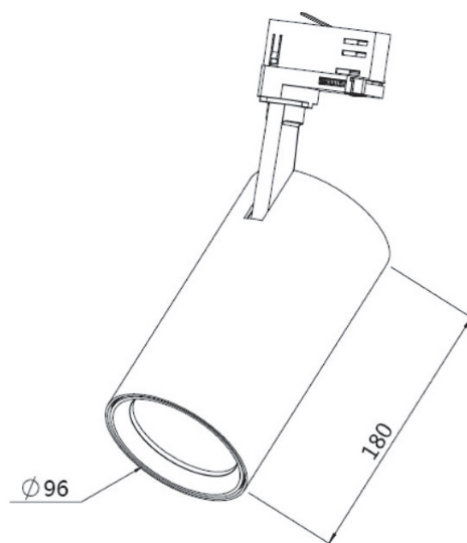

H(m)	E _{max}	D(m)
1m	19654lx	0.31m
2m	4913lx	0.61m
3m	2184lx	0.92m
4m	1228lx	1.22m
5m	786lx	1.53m

3000K 17deg

H(m)	E _{max}	D(m)
1m	12759lx	0.38m
2m	3190lx	0.75m
3m	1418lx	1.13m
4m	797lx	1.50m
5m	510lx	1.88m



3000K 24deg

Adjustable Track Light

JERI XL

Light Source	COB LED
Optic	LENS
Wattage [W]	35W
Beam angle [°]	17°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	3000lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	Φ96mm x H 180mm
Weight	1.2kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	800mA
Dimming type	ON/OFF / Triac
Packaging	670x500x350mm, 6pcs/CTN

Remark

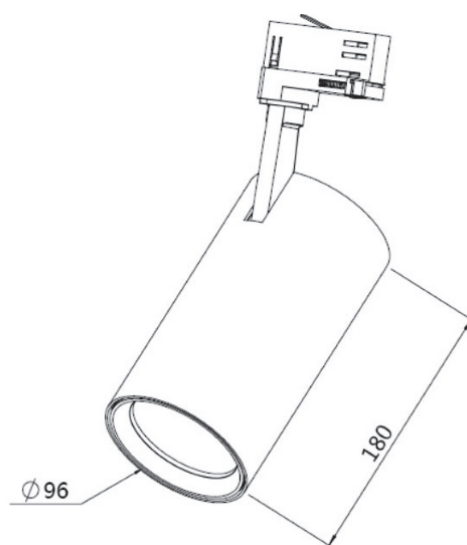

4000K 17 deg

H(m)	E _{max}	D(m)
1m	28131lx	0.29m
2m	7033lx	0.59m
3m	3126lx	0.88m
4m	1758lx	1.18m
5m	1125lx	1.47m



4000K 17 deg

Wallwasher Tracklight

JERI L Wallwasher

Light Source	COB
Optic	Lens
Wattage [W]	30W
Beam angle [°]	50°
CCT [K]	2700K / 3000K / 3500K / 4000K
CRI [Ra]	90+
Luminous flux [lm]	2600lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-350°
Dimensions	H178mm x R 55mm
Weight	0.95KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC220-240V 50/60 Hz
Driver Output	700mA, 35-37V
Dimming type	ON/OFF
Packaging	680x420x340mm, 15pcs/CTN

Remark

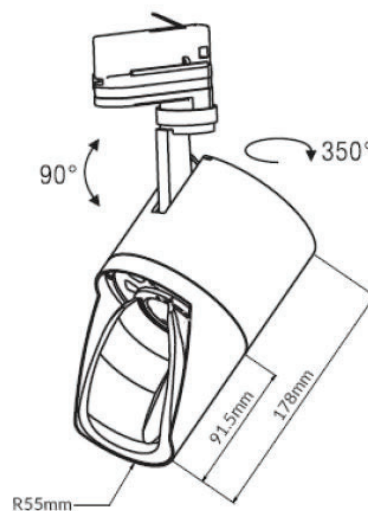

H(m)	Emax	D(m)	H(m)	Emax	D(m)
1m	2780lx	0.86m	1m	2909lx	0.85m
2m	695lx	1.72m	2m	727lx	1.71m
3m	308lx	2.58m	3m	323lx	2.57m
4m	174lx	3.43m	4m	182lx	3.42m
5m	111lx	4.29m	5m	116lx	4.27m

3000K - 50°

4000K-50°

Recessed Spotlight



JERI XS (RECESSED)

Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	16°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1100lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	ø62mm x H 177mm
Weight	0.5kg
Installation	Recessed
Driver	Remoted
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF/ 1-10V/ Triac
Packaging	515x415x305mm, 20pcs/CTN


Remark



Ø70

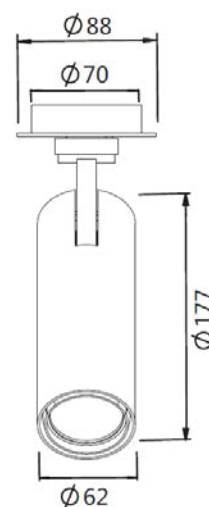

3000K 16deg



3000K 24deg



H(m)	Emax	D(m)
1m	6763lx	0.29m
2m	1691lx	0.58m
3m	752lx	0.87m
4m	423lx	1.17m
5m	271lx	1.46m

3000K 16deg

H(m)	Emax	D(m)
1m	4539lx	0.42m
2m	1135lx	0.83m
3m	504lx	1.25m
4m	284lx	1.66m
5m	182lx	2.08m

3000K 24deg

Recessed Spotlight



JERI M (RECESSED)

Light Source	COB LED
Optic	LENS
Wattage [W]	25W
Beam angle [°]	12°/24°/45°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1921lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	ø82mm x H 180mm
Weight	0.85kg
Installation	Recessed
Driver	Remote
Driver Input	AC220~240V 50/60Hz
Driver Output	600mA
Dimming type	ON/OFF / 1-10V/ Triac
Packaging	670x405x325mm, 15pcs/CTN


Remark



Ø70

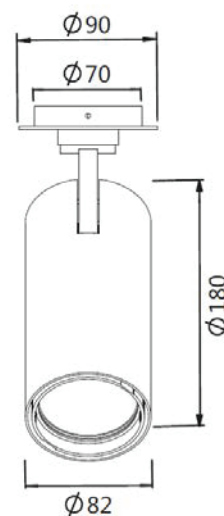

3000K 12deg



3000K 24deg



H(m)	Emax	D(m)
1m	24759lx	0.22m
2m	6190lx	0.45m
3m	2751lx	0.67m
4m	1547lx	0.89m
5m	990lx	1.11m

3000K 12deg

H(m)	Emax	D(m)
1m	11609lx	0.43m
2m	2902lx	0.86m
3m	1290lx	1.29m
4m	726lx	1.72m
5m	464lx	2.15m



3000K 24deg

Surface mounted Spotlight

JERI XS (SURFACE)

Light Source	COB LED
Optic	LENS
Wattage [W]	15W
Beam angle [°]	16°/24°/36°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1100lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	ø62mm x H 177mm
Weight	0.5kg
Installation	Recessed
Driver	Included
Driver Input	220V-240V 50-60Hz
Driver Output	350mA
Dimming type	ON/OFF/ 1-10V/ Triac
Packaging	515x415x305mm, 20pcs/CTN

Remark

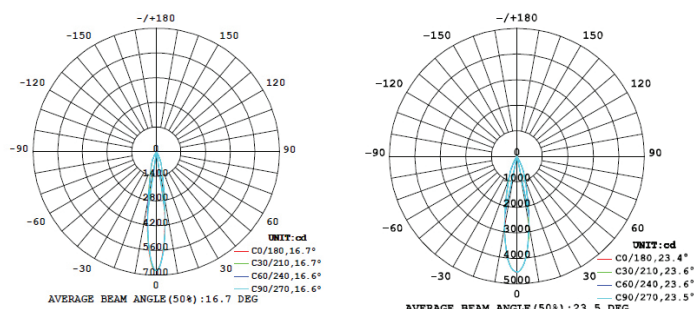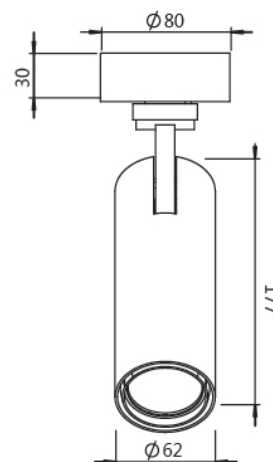

3000K 16deg

3000K 24deg

Zeplinn reserves the right to make technical & design changes without notice



H(m)	Emax	D(m)	H(m)	Emax	D(m)
1m	6763lx	0.29m	1m	4539lx	0.42m
2m	1691lx	0.58m	2m	1135lx	0.83m
3m	752lx	0.87m	3m	504lx	1.25m
4m	423lx	1.17m	4m	284lx	1.66m
5m	271lx	1.46m	5m	182lx	2.08m

3000K 16deg

3000K 24deg



Zeplinn™ 2020

Surface mounted Spotlight

JERI M (SURFACE)

Light Source	COB LED
Optic	LENS
Wattage [W]	25W
Beam angle [°]	12°/24°/45°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1921lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-355°
Dimensions	ø82mm x H 180mm
Weight	0.85kg
Installation	Recessed
Driver	Included
Driver Input	AC220~240V 50/60Hz
Driver Output	600mA
Dimming type	ON/OFF / 1-10V/ Triac
Packaging	670x405x325mm, 15pcs/CTN

Remark

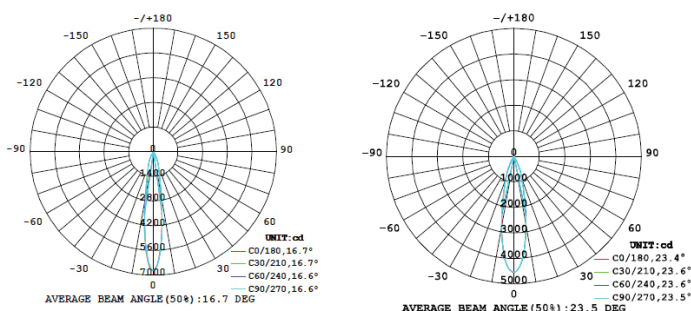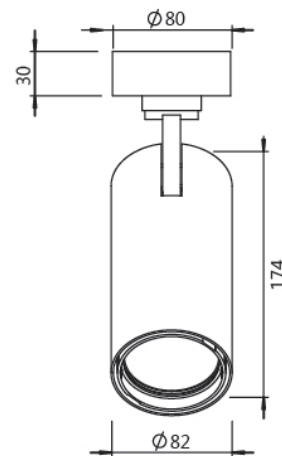

3000K 16°

3000K 24°

Zeplinn reserves the right to make technical & design changes without notice



H(m)	Emax	D(m)	H(m)	Emax	D(m)
1m	24759lx	0.22m	1m	11609lx	0.43m
2m	6190lx	0.45m	2m	2902lx	0.86m
3m	2751lx	0.67m	3m	1290lx	1.29m
4m	1547lx	0.89m	4m	726lx	1.72m
5m	990lx	1.11m	5m	464lx	2.15m

3000K 16°

3000K 24°

Zeplinn™ 2020





Adjustable Tracklight

BRIO L 28W



Light Source	COB
Optic	Lens
Wattage [W]	28W
Beam angle [°]	20°/26°/36°/60°
CCT [K]	2700K / 3000K / 3500K / 4000K
CRI [Ra]	90+
Luminous flux [lm]	2800lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	H100mm x Ø85mm
Weight	0.6KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC220~240V 50/60Hz
Driver Output	700mA
Dimming type	ON-OFF
Packaging	430x430x390mm, 16pcs/CTN

Remark



3000K 20deg

3000K 36deg

Zeplinn reserves the right to make technical & design changes without notice



H(m)	E _{max}	D(m)
1m	17848lx	0.34m
2m	4462lx	0.68m
3m	1983lx	1.02m
4m	1115lx	1.36m
5m	714lx	1.69m

3000K 20deg

H(m)	E _{max}	D(m)
1m	12520lx	0.46m
2m	3130lx	0.92m
3m	1391lx	1.38m
4m	783lx	1.84m
5m	501lx	2.30m

3000K 36deg

Zeplinn™ 2020



Zoomable Tracklight

ZEPSTAR S




Light Source	COB
Optic	Lens
Wattage [W]	20W
Beam angle [°]	20-35°
CCT [K]	2700K / 3000K / 3500K / 4000K
CRI [Ra]	90
Luminous flux [lm]	1100lm
MacAdam Step	3
IP rate	20
Finish	Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	H253mm x Ø82mm
Weight	1.15kg
Installation	Track mounted (3 Phase 4 wires)
Driver	Included
Driver Input	AC220~240V 50/60Hz
Driver Output	500mA
Dimming type	ON/OFF / 1-10V

Remark

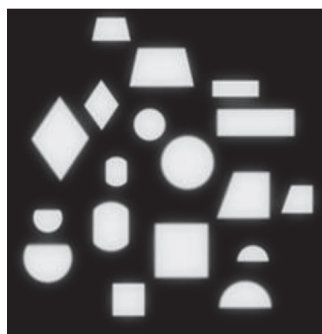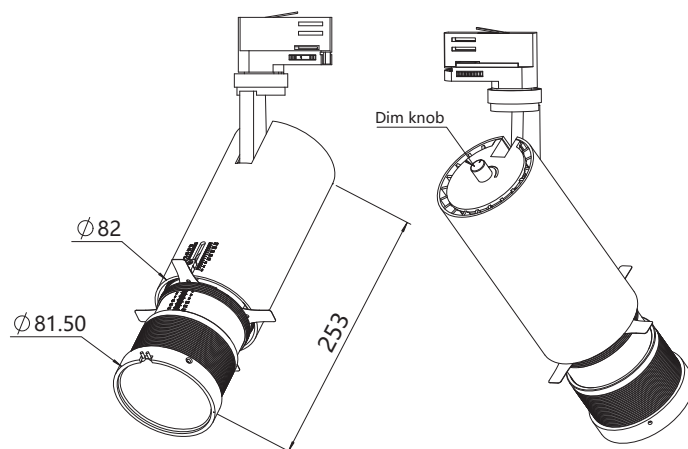

Shapes of lens



3000K 22 deg

H(m)	E _{max}	D(m)
1m	7611lx	0.39m
2m	1903lx	0.78m
3m	846lx	1.17m
4m	475lx	1.56m
5m	304lx	1.95m

3000K 22 deg



Zoomable Tracklight

ZEPSTAR M



Light Source	COB
Optic	Lens
Wattage [W]	25W
Beam angle [°]	20-35°
CCT [K]	2700K / 3000K / 3500K / 4000K
CRI [Ra]	90
Luminous flux [lm]	1300lm
MacAdam Step	3
IP rate	20
Finish	Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	H253mm x Ø82mm
Weight	1.15kg
Installation	Track mounted (3 Phase 4 wires)
Driver	Included
Driver Input	AC220~240V 50/60Hz
Driver Output	600mA
Dimming type	ON/OFF / 1-10V

Remark

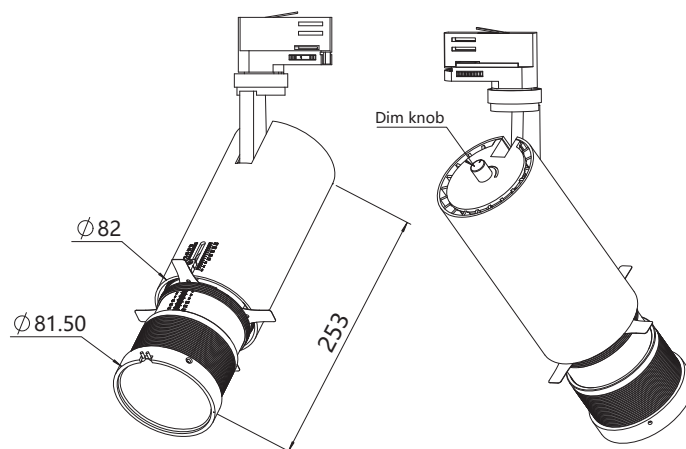


Shapes of lens

Track Light


BERLIN S

Light Source	LED Cree
Optic	LENS
Wattage [W]	15 W
Beam angle [°]	15°/ 24°/ 38°/ 60°
CCT [K]	3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	1272lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 165mm
Weight	
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	90-240V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark

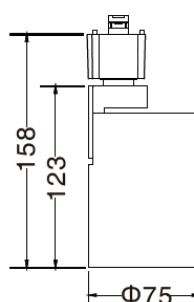

3-pin track adaptor

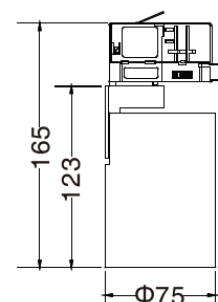

4-pin track adaptor

Accessories	Description
	Honey-comb
	Barn-door




Track Light


BERLIN M

Light Source	LED Cree
Optic	LENS
Wattage [W]	20 W
Beam angle [°]	15°/ 24°/ 38°/ 60°
CCT [K]	3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	2076lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 205mm
Weight	
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	90-240V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark

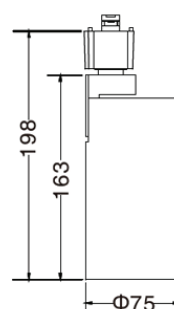

3-pin track adaptor

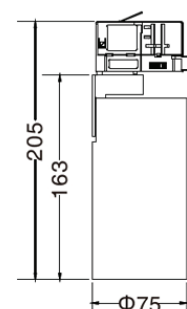

4-pin track adaptor

Accessories	Description
	Honey-comb
	Barn-door




Track Light

BERLIN L

Light Source	LED Cree
Optic	LENS
Wattage [W]	30W
Beam angle [°]	15°/ 24°/ 38°/ 60°
CCT [K]	3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	2720lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 163mm
Weight	
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	90-240V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark

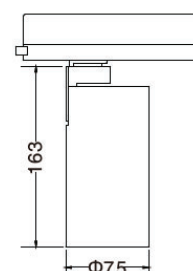

3-pin track adaptor/4-pin track adaptor

Accessories	Description
	Honey-comb
	Barn-door




Zoomable Track Light


BERLIN ZOOMABLE XS

Light Source	LED Cree
Optic	LENS
Wattage [W]	10 W
Beam angle [°]	Zoomable 6°-50°
CCT [K]	3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	388/418/449 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 126mm
Weight	
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	90-240V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark




3-pin track adaptor



4-pin track adaptor

Accessories	Description
	Honey-comb
	Barn-door




Zoomable Track Light


BERLIN ZOOMABLE S

Light Source	LED Cree
Optic	LENS
Wattage [W]	15 W
Beam angle [°]	Zoomable 6°-50°
CCT [K]	3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	946/965/975 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 126mm
Weight	
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	90-240V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark

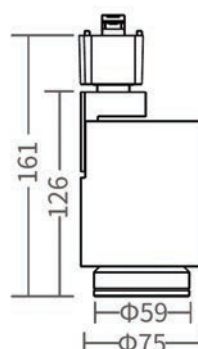


3-pin track adaptor

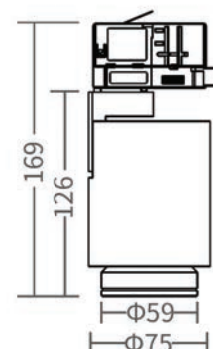

4-pin track adaptor

Accessories	Description
	Honey-comb
	Barn-door




Zoomable Track Light


DUBLIN XS

Light Source	LED Cree
Optic	LENS
Wattage [W]	10 W
Beam angle [°]	Zoomable 15°-45°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	619/625/644/658 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ60mm x H 140mm
Weight	0.510KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac


Remark
Honey comb louver optional

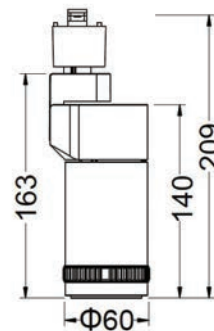


3-pin track adaptor

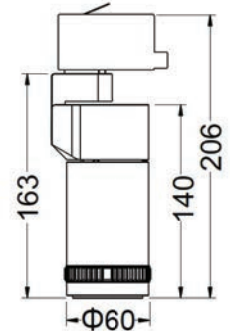

4-pin track adaptor



10W - 3000K - 45°

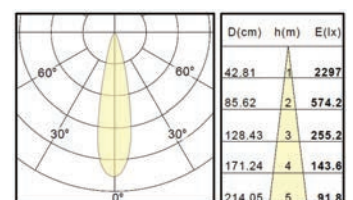


10W - 3000K - 15°

Zoomable Track Light


DUBLIN S

Light Source	LED Cree
Optic	LENS
Wattage [W]	15 W
Beam angle [°]	Zoomable 15°-45°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	1090/1128/1163/1192 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ60mm x H 140mm
Weight	0.510KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac

Remark
Honey comb louver optional



3-pin track adaptor

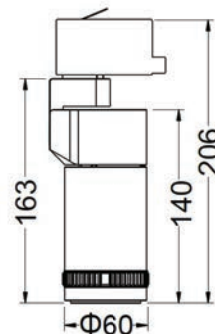


4-pin track adaptor

Zoomable Track Light


DUBLIN M

Light Source	LED Cree
Optic	LENS
Wattage [W]	20 W
Beam angle [°]	Zoomable 25°-60°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	1584/1674/1764/1818 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ84mm x H 158mm
Weight	0.810KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac

Remark

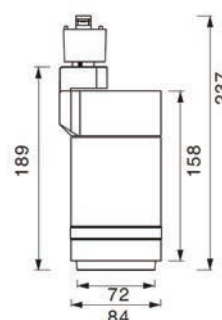

3-pin track adaptor




4-pin track adaptor

Zoomable Track Light


DUBLIN L

Light Source	LED Cree
Optic	LENS
Wattage [W]	30 W
Beam angle [°]	Zoomable 25°-60°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	2335/2470/2511/2565 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ84mm x H 158mm
Weight	0.810KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac

Remark



3-pin track adaptor




4-pin track adaptor

Zoomable Track Light


VISIO S

Light Source	LED Cree
Optic	LENS
Wattage [W]	15 W
Beam angle [°]	Zoomable 15°-90° / 15°-70°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	973/1047/1102/1148 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 178mm
Weight	1KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark

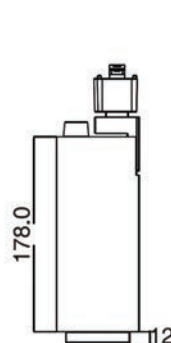

3-pin track adaptor

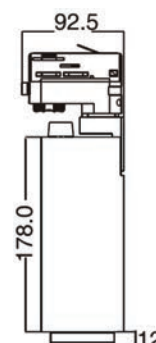

4-pin track adaptor

Accessories



Description



Honey-comb



Barn-door




Zoomable Track Light


VISIO M

Light Source	LED Cree
Optic	LENS
Wattage [W]	20 W
Beam angle [°]	Zoomable 15°-90° / 15°-70°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	1305 /1403 /1477/1538 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 178mm
Weight	1KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark



3-pin track adaptor

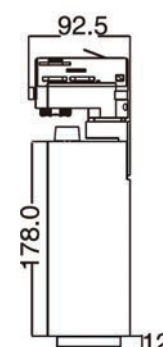

4-pin track adaptor

Accessories



Description



Honey-comb



Barn-door




Zoomable Track Light


VISIO L

Light Source	LED Cree
Optic	LENS
Wattage [W]	30 W
Beam angle [°]	Zoomable 15°-90° / 15°-70°
CCT [K]	2700K/3000K/4000K/5000K
CRI [Ra]	90+
Luminous flux [lm]	1681 /1801 /1896 /1975 lm
MacAdam Step	3
IP rate	20
Finish	White/Black / Silver
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-360°
Dimensions	Φ75mm x H 150mm
Weight	1.64KG
Installation	Track mounted (3 phases 4 wires)
Driver	Included
Driver Input	100-277V AC - 50-60Hz
Driver Output	N/A
Dimming type	ON-OFF / Triac / 1-10V

Remark

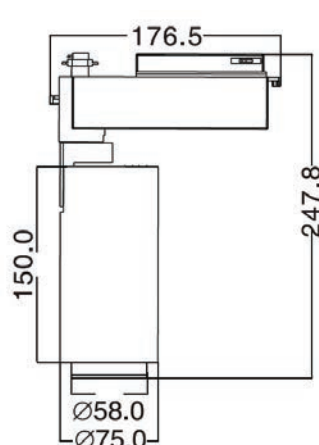

3-pin track adaptor

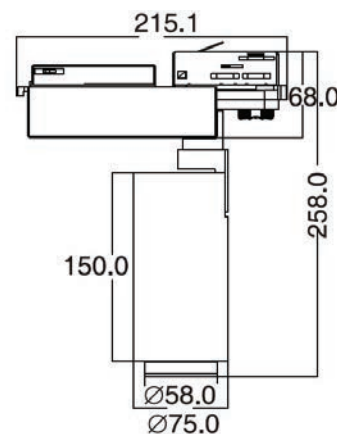

4-pin track adaptor

Accessories



Description



Honey-comb



Barn-door



Adjustable Tracklight

Devon M


23W Fixed Beam Angle Version

Light Source	COB LED
Optic	LENS
Wattage [W]	23W
Beam angle [°]	16°/22°/34°/43°
CCT [K]	2700K/3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.62kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board dimming

Remark

Luminous Flux:

16° - 2000 lm(2700K); 2150.6 lm(3000K); 2279.6 lm(4000K)
 22° - 1998.1 lm(2700K); 2148.6 lm(3000K); 2277.5 lm(4000K)
 34° - 1886.3lm(2700K); 2028.3 lm(3000K); 2150 lm(4000K)
 43° - 1869.6 lm(2700K); 2010.3 lm(3000K); 2130.9 lm(4000K)

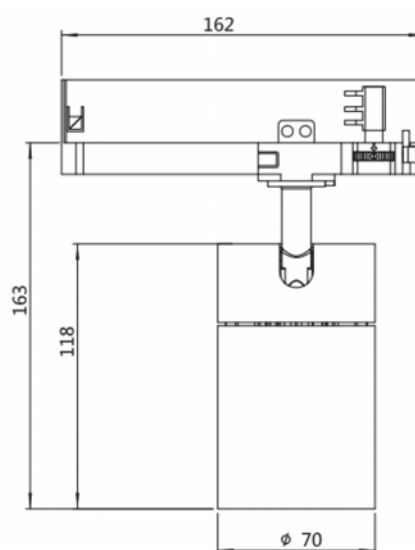

Honeycomb L01 Oval diffuser L02 Diffuser L03 Anti-glare ring L04

Accessories

Adjustable Tracklight

Devon L

27W Fixed Beam Angle Version

Light Source	COB LED
Optic	LENS
Wattage [W]	27W
Beam angle [°]	16°/22°/34°/43°
CCT [K]	2700K/3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.62kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board dimming

Remark


Luminous Flux:

16° - 2294.9 lm(2700K); 2467.6 lm(3000K); 2615.7 lm(4000K)

22° - 2300.1 lm(2700K); 2473.3 lm(3000K); 2621.7 lm(4000K)

34° - 2156.7 lm(2700K); 2319 lm(3000K); 2458.1 lm(4000K)

43° - 2149.2 lm(2700K); 2311 lm(3000K); 2449.7 lm(4000K)

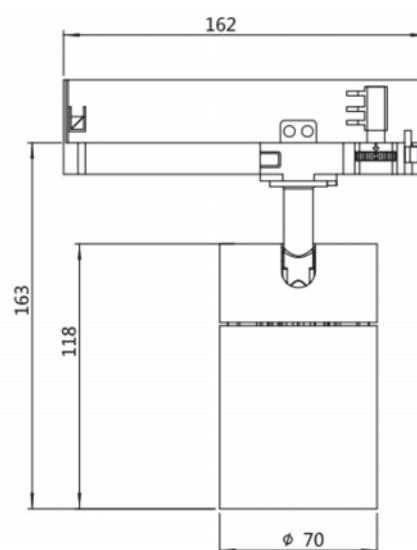

Adjustable Tracklight


Devon XL

35W Fixed Beam Angle Version

Light Source	COB LED
Optic	LENS
Wattage [W]	35W
Beam angle [°]	21°/26°/36°/45°/36°x59°
CCT [K]	2700K/3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	IP20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.78kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board dimming

Remark

21° - 3011.8 lm(2700K); 3238.5 lm(3000K); 3432.8 lm(4000K)
 26° - 2964.8 lm(2700K); 3188 lm(3000K); 3379.3 lm(4000K)
 36° - 2943 lm(2700K); 3164.5 lm(3000K); 3354.4 lm(4000K)
 45° - 2833.6 lm(2700K); 3046.9 lm(3000K); 3229.7 lm(4000K)
 36°x59° - 2855.8lm(2700K); 3070.7lm(3000K); 3254.9lm(4000K)

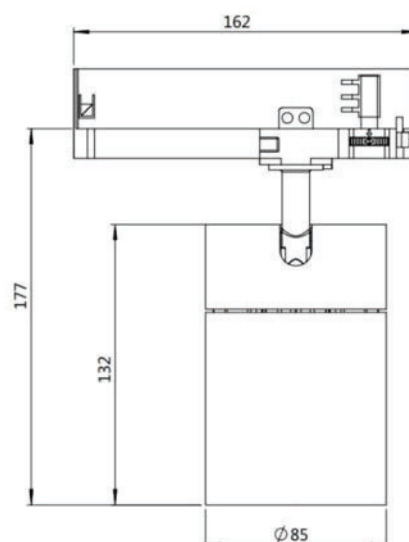

Adjustable Tracklight

Devon M Zoom [16°-34°]


23W Zoomable Beam Angle Version

Light Source	COB LED
Optic	ZOOMABLE LENS
Wattage [W]	23W
Beam angle [°]	16°-34° zoomable
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.62kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board Dimming

Remark

Luminous Flux: (Approx. values)

16°-34° - 1650-1850 lm(3000K); 1550-1720 lm(4000K)

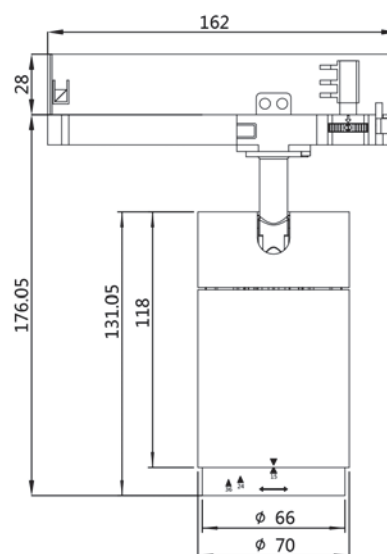

Adjustable Tracklight

Devon M Zoom [34°-60°]


23W Zoomable Beam Angle Version

Light Source	COB LED
Optic	ZOOMABLE LENS
Wattage [W]	23W
Beam angle [°]	34°-60° zoomable
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.62kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board Dimming

Remark

Luminous Flux: (Approx. values)

34°-60 - 2100-2200 lm(3000K); 2200-2300 lm(4000K)

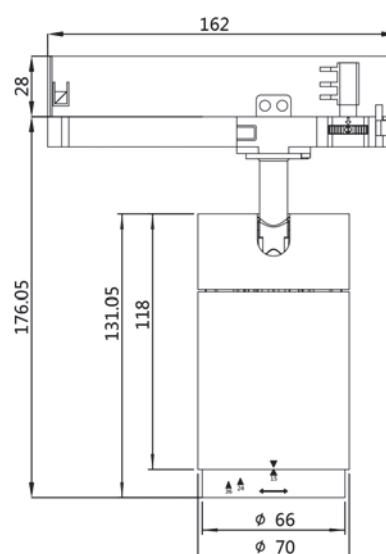

Adjustable Tracklight

Devon L Zoom [16°-34°]


27W Zoomable Beam Angle Version

Light Source	COB LED
Optic	ZOOMABLE LENS
Wattage [W]	27W
Beam angle [°]	16°-34° zoomable
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.62kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board Dimming

Remark

Luminous Flux: (Approx. values)

16°-34° - 2450-2650 lm(3000K); 2300-2500 lm(4000K)

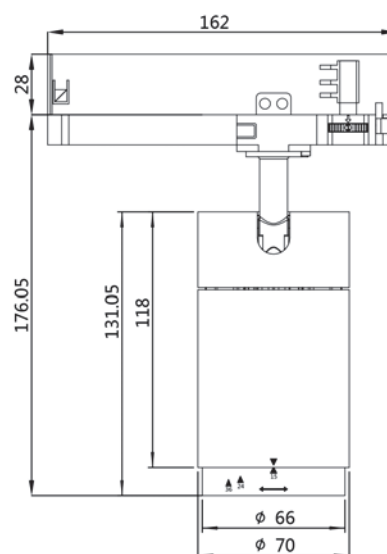

Adjustable Tracklight

Devon L Zoom [34°-60°]


27W Zoomable Beam Angle Version

Light Source	COB LED
Optic	ZOOMABLE LENS
Wattage [W]	27W
Beam angle [°]	34°-60° zoomable
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.62kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board Dimming

Remark

Luminous Flux: (Approx. values)

34°-60 - 2400-2500 lm(3000K); 2500-2600 lm(4000K)

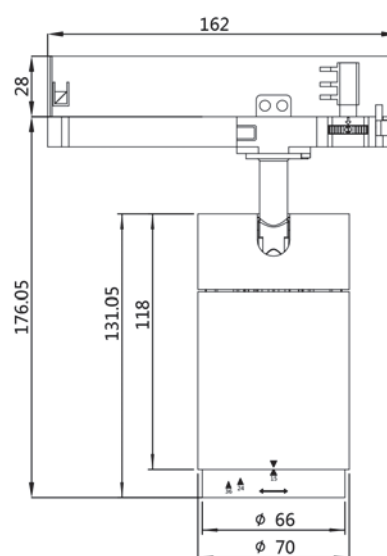

Adjustable Tracklight

Devon XL Zoom [16°-34°]


35W Zoomable Beam Angle Version

Light Source	COB LED
Optic	ZOOMABLE LENS
Wattage [W]	35W
Beam angle [°]	16°-34° zoomable
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.78kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board Dimming

Remark

Luminous Flux: (Approx. values)

16°-34° - 3050-3250 lm(3000K); 3200-3450 lm(4000K)

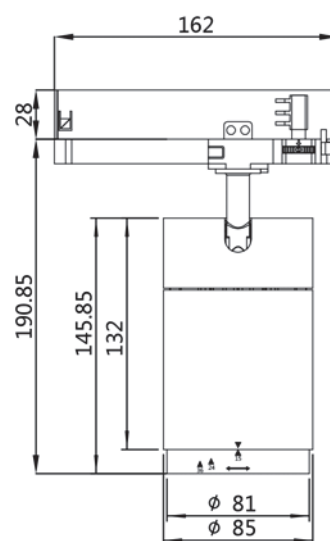

Adjustable Tracklight

Devon XL Zoom [34°-60°]


35W Zoomable Beam Angle Version

Light Source	COB LED
Optic	ZOOMABLE LENS
Wattage [W]	35W
Beam angle [°]	34°-60° zoomable
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	See Remarks
MacAdam Step	≤3
IP rate	20
Finish	Matte White/Matte Black
Material	Aluminium
Tilting angle	0-60°
Pan movement	0-350°
Dimensions	as shown
Weight	0.78kg
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	
Dimming type	On/Off; DALI; TRIAC; CASAMBI On-board Dimming

Remark

Luminous Flux: (Approx. values)



34°-60° - 3100-3300 lm(3000K); 3300-3500 lm(4000K)

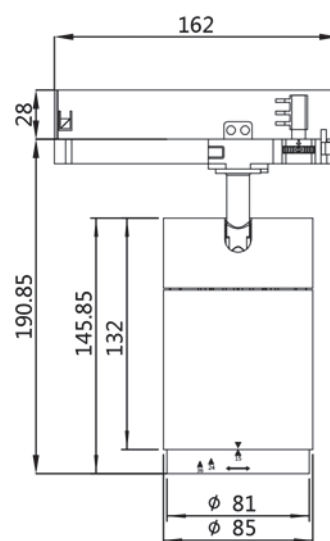


Recessed Linear

ZEPSTRING RECESSED LINEAR

Light Source	SMD 3030
Optic	LENS
Wattage [W]	15W/30W/40W
Beam angle [°]	15°/24°/36°/15x35°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm/2400lm/3150lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	L 328/646/964 x W37 x H 118
Weight	0.8KG/1.4KG/2.0KG
Installation	Recessed
Driver	Included
Driver Input	AC100~277V 50/60Hz
Driver Output	350mA/ 700mA/ 1000mA
Dimming type	ON/OFF / 1-10V

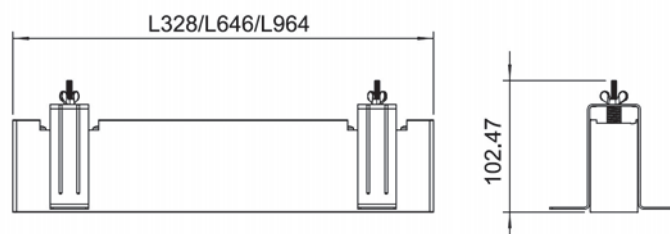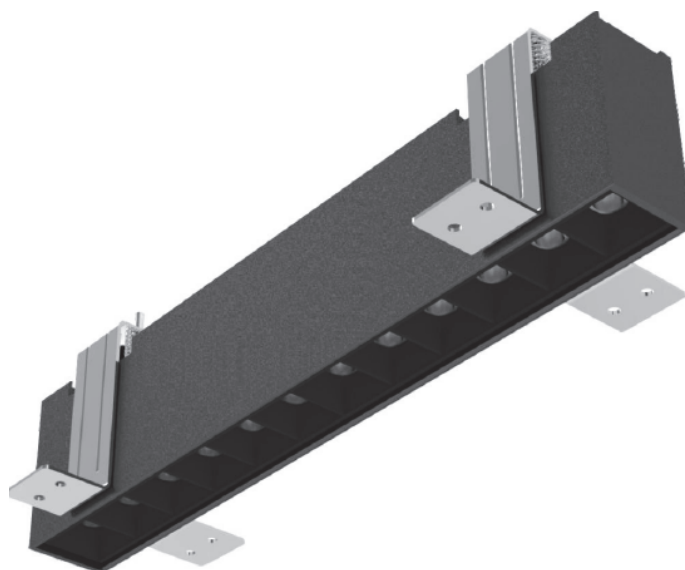

Remark



L646 24deg

H(m)	Emax	D(m)
1m	14158lx	0.39m
2m	3540lx	0.78m
3m	1573lx	1.17m
4m	884lx	1.56m
5m	566lx	1.95m


L646 24deg

High Power LED Linear Light

ZEPSTRING FOCUS MINI

Light Source	SMD 3030
Optic	LENS
Wattage [W]	10W
Beam angle [°]	15°/30°/45°
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1170lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium & Steel
Tilting angle	±60°
Pan movement	0-350°
Dimensions	L 137 x W 34.5 x H 80 mm
Weight	0.670 KG
Installation	Track Mounted (3 Phase 4 Wires)
Driver	INTEGRAL
Driver Input	220V-240V 50-60Hz
Driver Output	DC24V
Dimming type	ON/OFF / 1-10V / DALI

Remark


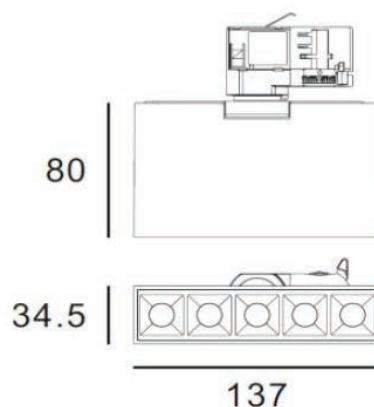


Adjustable Track Light

ZEPSTRING WIDE

Light Source	SMD 3030
Optic	LENS
Wattage [W]	15W/30W/40W
Beam angle [°]	15°/24°/36°/15x35°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1150lm/ 2235lm/ 3100lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	±60°
Dimensions	L 328/646/964 x W37 x H 118
Weight	0.8KG/1.4KG/2.0KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC100~277V 50/60Hz
Driver Output	350mA/ 700mA/ 1000mA
Dimming type	ON/OFF / 1-10V

Remark

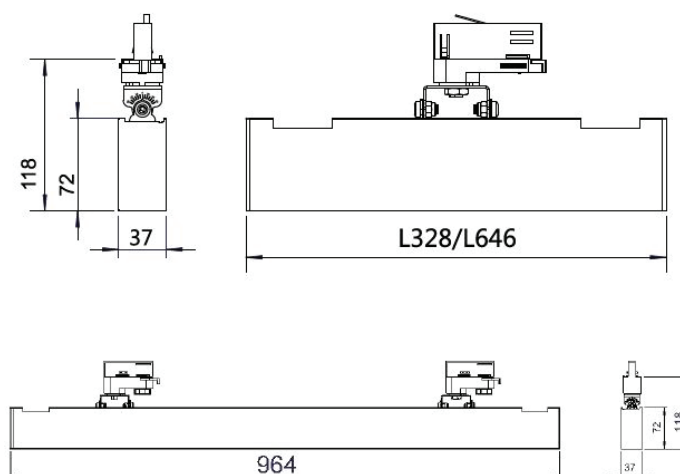

L646 3000K

H(m)	E _{max}	D(m)
1m	127lx	1.45m
2m	317lx	2.90m
3m	141lx	4.35m
4m	79lx	5.81m
5m	50lx	7.26m



30W L646 3000K

Adjustable Track Light

ZEPSTRING FOCUS SOLO

Light Source	SMD 3030
Optic	LENS
Wattage [W]	15W/30W/40W
Beam angle [°]	15°/24°/36°/15x35°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm/ 2400lm/ 3150lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	±60°
Pan movement	0-350°
Dimensions	L 328/646/964 x W37 x H 118
Weight	0.8KG/1.4KG/2.0KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC100~277V 50/60Hz
Driver Output	350mA/ 700mA/ 1000mA
Dimming type	ON/OFF / 1-10V

Remark

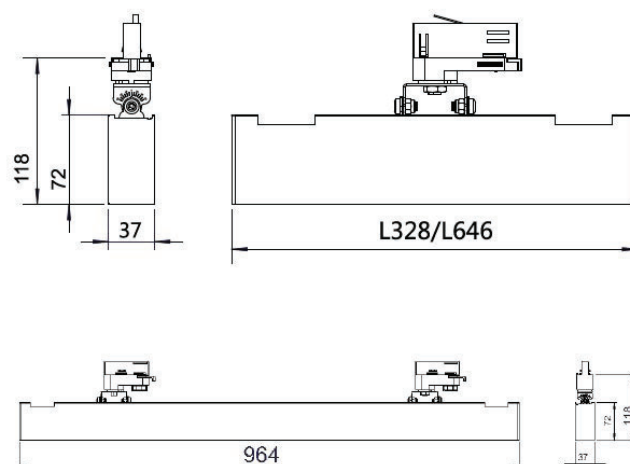

L646 3000K 24deg

H(m)	E _{max}	D(m)
1m	14158lx	0.39m
2m	3540lx	0.78m
3m	1573lx	1.17m
	884lx	1.56m
5m	566lx	1.95m





L646 3000K 24deg

Adjustable Track Light

ZEPSTRING FOCUS DUO

Light Source	SMD 3030
Optic	LENS
Wattage [W]	30W/60W/80W
Beam angle [°]	15°/24°/36°/15x35°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	2600lm/ 4800lm/ 6300lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-90°
Pan movement	0-350°
Dimensions	L 328/646/964 x W77 x H 118
Weight	0.8KG/1.4KG/2.0KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC100~277V 50/60Hz
Driver Output	350mA*2/ 700mA*2/ 1000mA*2
Dimming type	ON/OFF / 1-10V

Remark

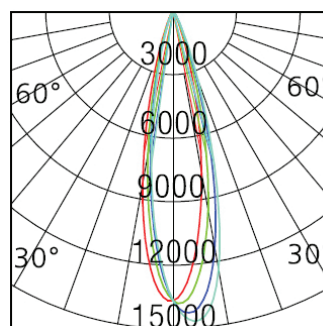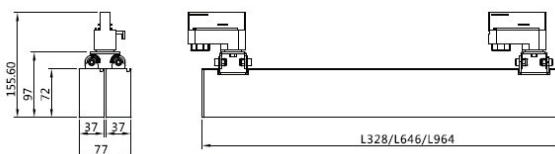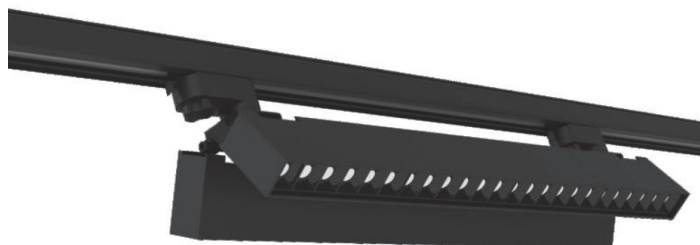

L646 3000K 24deg

H(m)	Emax	D(m)
1m	14158lx	0.39m
2m	3540lx	0.78m
3m	1573lx	1.17m
4m	884lx	1.56m
5m	566lx	1.95m



60W L646 3000K 24deg

Adjustable Track Light

ZEPSTRING WALLWASHER

Light Source	SMD 3030
Optic	LENS
Wattage [W]	15W/30W/40W
Beam angle [°]	15°/24°/36°/15x35°
CCT [K]	2700K/3000K/3500K/4000K
CRI [Ra]	90+
Luminous flux [lm]	1300lm/ 2400lm/ 3150lm
MacAdam Step	3
IP rate	20
Finish	White/Black
Material	Aluminium
Tilting angle	0-50°
Pan movement	Fixed
Dimensions	L 328/646/964 x W40 x H 118
Weight	0.8KG/1.4KG/2.0KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC100~277V 50/60Hz
Driver Output	350mA/ 700mA/ 1000mA
Dimming type	ON/OFF / 1-10V

Remark

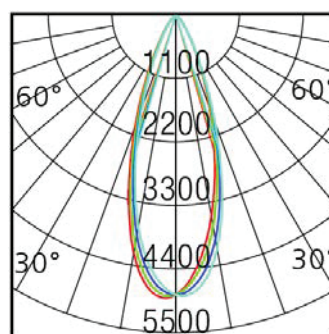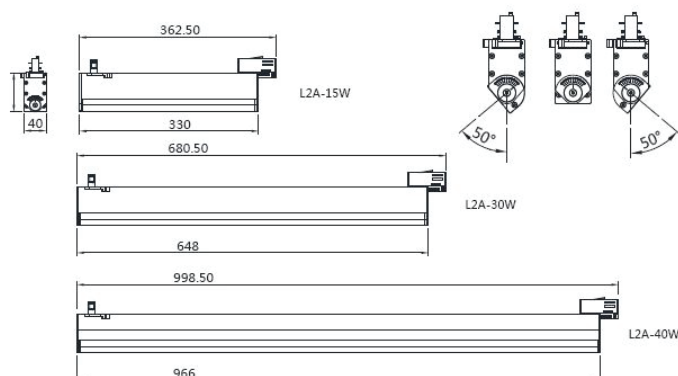

30W 3000K 36deg

H(m)	E _{max}	D(m)
1m	6089lx	0.59m
2m	1522lx	1.18m
3m	676lx	1.77m
4m	380lx	2.37m
5m	243lx	2.96m



30W 3000K 36deg

Adjustable Track Light

ZEPSTRING ADJUSTABLE PANEL

Light Source	SMD
Optic	LENS
Wattage [W]	44W
Beam angle [°]	30°/60°/90°/SA/DA
CCT [K]	3000K/4000K
CRI [Ra]	80+
Luminous flux [lm]	5000lm+
MacAdam Step	3
IP rate	20
Finish	Black
Material	Aluminium
Tilting angle	0-130°
Pan movement	Fixed
Dimensions	L 582.3 x W 136.6 x H 97.75
Weight	2.5 KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC220~240V 50/60Hz
Driver Output	1250mA
Dimming type	ON/OFF

Remark

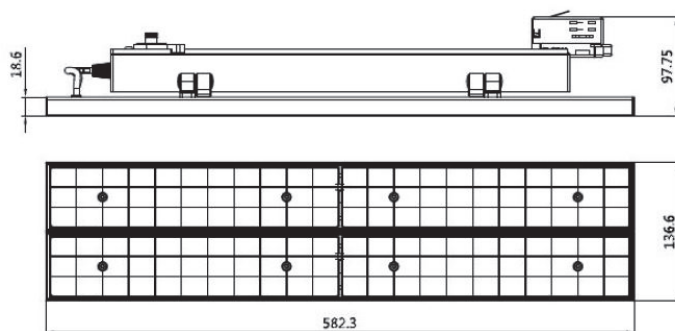

3000K 36deg

H(m)	Emax	D(m)
1m	10591lx	0.61m
2m	2648lx	1.23m
3m	1177lx	1.84m
4m	662lx	2.46m
5m	424lx	3.07m



3000K 36deg

Track Light

ZEPSTRING PANEL

Light Source	SMD
Optic	LENS
Wattage [W]	70W
Beam angle [°]	36°/70°/90°/SA/DA
CCT [K]	3000K/4000K
CRI [Ra]	90+
Luminous flux [lm]	8000lm+
MacAdam Step	3
IP rate	20
Finish	Black
Material	Aluminium
Tilting angle	Fixed
Pan movement	Fixed
Dimensions	L 581.5 x W194.2 x H 92.55
Weight	3.0KG
Installation	Track mounted (3 Phase 4 wires)
Driver	INTEGRAL
Driver Input	AC220~240V 50/60Hz
Driver Output	2000mA
Dimming type	ON/OFF

Remark

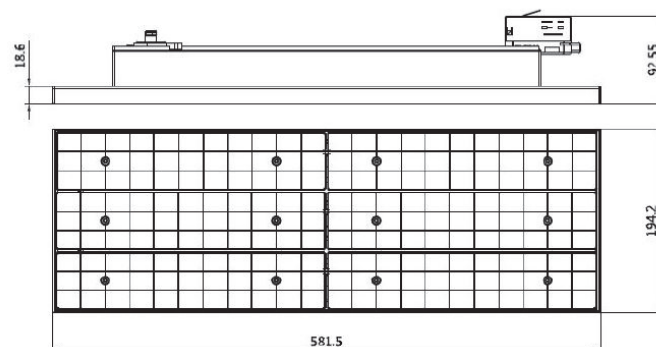

3000K 36deg

H(m)	E _{max}	D(m)
1m	16567lx	0.63m
2m	4142lx	1.25m
3m	1841lx	1.87m
4m	1035lx	2.49m
5m	663lx	3.71m

3000K 36deg

ZEPLINN

Unit E, 10/F, Joint Venture Factory Bldg,
76 Hung To Road, Kwun Tong,
Kowloon, Hong Kong
(+852) 2525 7471
info@zeplinn.com

